RECORDER FIELD DATA TI-13258-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S. NAVY	195	BARROW	NORTH SLOPE	ALASKA	U.S.A.	630	900	2000	2030	5-11-72	Orand	1 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN										FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEPS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	DEAD TRACES
G	16	USN-7	476	SHOT	DPB	1015	25	60	2		0	E		10	0				X		5		OPERATE	30	36	42	48	54	42	90	FAST	192	62	8	18	–	
	15		477			1030																															12
	14		500			1045																															4
	13		501			1100																															
	12		502			1200																															
	11		503			1230																															
	10		504			1300																															
	9		505			1315																															47
	8		506			1345			3																												39
	7		507			1400			3																												1
	6		510			1415			3																												18
	5		511			1430			2																												10
	4		513			1445																															2
	3		514			1500																															42
	2		515			1515																															48 thur 41 34
	1		516			1530																															48 thur 33

END OF LINE G

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	HSJ 14	12	20	INLINE	110	INLINE.
					880	Shot Point Int

2585'-55'-0-55'-2585'

SHOT CONFIGURATION

↑N

55' From Sp to group centers 24 & 25

direction of progress

1-55'-1-55'-1

48 25 24 1

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 75 %

LOWER SET LIMIT 25 %

FORMAT TYPE:

☐ 9 TRACK ☒ 21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

463 thur 475 daily tests

...DER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S. NAVY	195	BARROW	NORTH SLOPE	ALASKA	U.S.A.	630	915	2000	2100	5-10-72	Orand	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEISMOMETER OFFSET	SEIS. DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY AUTO	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	DEAD TRACES
G	23	USN-6	454	SACT	DPB	1730	25	60	2		0	E		10	0				K		5	OPERATE		30	36	42	48	54	48	90	FAST	192	62	8	18	—	1 thur 16
	22		455			1745																															1 thur 8 43
	21		456			1830																							42								35
	20		457			1915																															
	19		460			1930																															
	18		461			1945																															
	17		462			2000																															

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	HSJ 14	12	20	INLINE	110	INLINE

2585-55' 0-55'-2585

SP INT. 880

SHOT CONFIGURATION

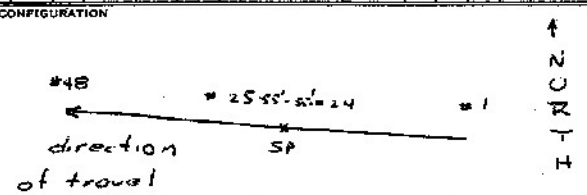

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 75 %
LOWER SET LIMIT 25 %
FORMAT TYPE:
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

REEL USN-6 ALSO HAS PORTION OF LINE I SP 61 thur SP 73