RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
USN	182	NPR-4								4-20-75	DOROSH	1 OF 1

IDENTIFICATION				SHOT			SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19r																																				
											- CAMP MOVE																									
											- SURVEY AND DRILLS												STARTING LINE 19.													
											- LINE CREW LAYING OUT SPREAD.																									
											- NO PRODUCTION SHOOTING.																									

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB
UPPER SET LIMIT _____ %
LOWER SET LIMIT _____ %
FORMAT TYPE:
☐ 9 TRACK ☐ 21 TRACK
GALVO LEVEL:
1-24 _____ DB AUX _____ DB
OTHER:

MISCELLANEOUS INFORMATION:

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R-4	NORTH SLOPE	ALASKA	USA					4-21-75	DOROSH	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19X	27	698 515	046				1/100	60/90	2			5				1/37	2				6		OPER.	42 60	48 60	54 60	60 54	60 48	60 42	90	FAST	608	124	8	36		
	28		047				1/100	60/90	2							1/41																					
	29		050				1/100	60/90	2							1/45																					
	30		051				1/100	60/90	2							1/49																					
	31		053	052 M.F.			1/100	60/90	2							1/1	3																				
	32		054				1/100	60/90	2							1/5																					
	33		055				1/100	60/90	2							1/9																					
	34	698 515	056				1/100	60/90	2							1/13																					
	35		057				1/100	60/90	2							1/17																					
	36		060				1/100	60/90	2							1/21																					
	37		061				1/100	60/90	2							1/25																				#45-DEAD.
	38		062				1/100	60/90	2							1/29																					
	39		063				1/100	60/90	2							1/33																					
	40		064				1/100	60/90	2							1/37																					
	41		065				1/100	60/90	2							1/41																					
	42		066				1/100	60/90	2							1/45																					
	43		067				1/100	60/90	2							1/49																					
TAPE CHANGE.																																					
		698 514.																																			

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SAME AS PAGE ONE.

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE: TIAC

☐ 9 TRACK ☒ 21 TRACK

GALVO LEVEL:

1-24 21 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R.-4.	NORTH SLOPE	ALASKA	U.S.A.	07:00	08:30	20:30	21:00	4-21-75	DOROSH	1 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19x	1	~~648~~ 512	013				1x100	60/90	2			S				1/1	1		✓		6		OPER	42 60	48 60	54 60	60 54	60 48	60 42	90	FAST	608	124	8	36		8 GEP. TAIL SPREAD
	2		014				1x100	60/90	2							1/1																					
	3		015				1x100	60/90	2							1/1																					
	4		016				1x100	60/90	2							1/1																					
	5		017				1x100	60/90	2							1/1																					
	6		020				1x100	60/90	2							1/5																					
	7		021				1x100	60/90	2							1/9																					
	8		023	022 M.F.			1x100	60/90	2							1/13																					
	9		024				1x100	60/90	2							1/17																					
	10		025				1x100	60/90	2							1/21																					
	11	2	026				1x100	60/90	2							1/25																					
	12	9	027				1x100	60/90	2							1/29																					
	13	3	030				1x100	60/90	2							1/33																					
	14	514	031				1x100	60/90	2							1/37																					
	15	5	032				1x100	60/90	2							1/41																					
	16		033				1x100	60/90	2							1/45																					
	17		034				1x100	60/90	2							1/49																					
	18		035				1x100	60/90	2							1/1	2																				
	19		036				1x100	60/90	2							1/5																					
	20		037				1x100	60/90	2							1/9																					
TAPE CHANGE																																				
	21	~~648~~ 515	040				1x100	60/90	2							1/13																					
	22	3	041				1x100	60/90	2							1/17																					
	23	9	042				1x100	60/90	2							1/21																					
	24	3	043				1x100	60/90	2							1/25																					
	25	514	044				1x100	60/90	2							1/29																					
	26	5	045				1x100	40/70	2							1/33																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	102	9	25'	INLINE.	330'	48 GEP. SPLIT. 600%

SHOT CONFIGURATION

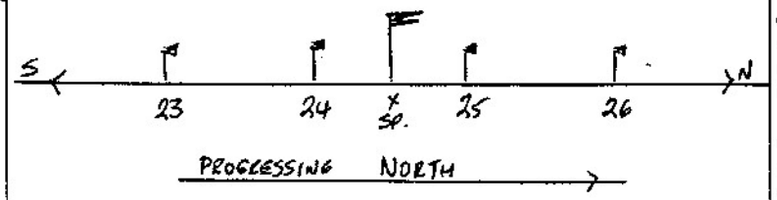

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

F-01 – 010 DRD
F-011 FILTER PULSE.
F-012 TTB.

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R - 4	NORTH SLOPE	ALASKA	USA	07:00	07:30	17:30	18:00	4-22-75	DODOSH	1 of 1

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS			REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19r	44	~~646~~ ~~514~~ ✓	102				1X100	60/90	2			S				1/1	1		✓		6		OPER	42 60	48 60	54 60	60 54	60 42	60 42	90	FAST	608	124	8	36		
	45		103				1X100	60/90	2							1/5																					
	46		104				1X100	60/90	2							1/9																					
	47		105				1X100	60/90	2							1/13																					
	48		106				1X100	60/90	2							1/17																					
	49		107				1X100	60/90	2							1/21																					
	50		110				1X100	60/90	2							1/25																					
	51		111				1X100	60/90	2							1/29																					
	52		112				1X100	60/90	2							1/33																					
	53		113				1X100	60/90	2							1/37																					
	54		114				1X100	60/90	2							1/41																					
	55	514 394	115				1X100	60/90	2							1/45																					
	56		116				1X100	60/90	2							1/49																					
																																					47-48 DEAD.
	57		117				1X100	60/90	2							1/1	2																				
	58		120				1X100	60/90	2							1/5																					
	59		121				1X100	60/90	2							1/9																					
	60		122				1X100	60/90	2							1/13																					
	61		123				1X100	60/90	2							1/17																					
	62		124				1X100	60/90	2							1/21																					
	63		125				1X100	60/90	2							1/25																					
	64		126				1X100	60/90	2							1/29																					
	65		127				1X100	60/90	2							1/33																					#47-DEAD
TAPE CHANGE																																					
	66	~~648~~ ~~515~~ ✓	130				1X100	60/90	2							1/37																					43- "
	67	514 395	131				1X100	60/90	2							1/41																					39- "
	68		132				1X100	60/90	2		495'N					1/45																					35- "
	69		133				1X100	60/90	2							1/49																					31- "

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	10Ω	9	25'	INLINE.	330'	48 GRP. SPLIT. 600%

SHOT CONFIGURATION

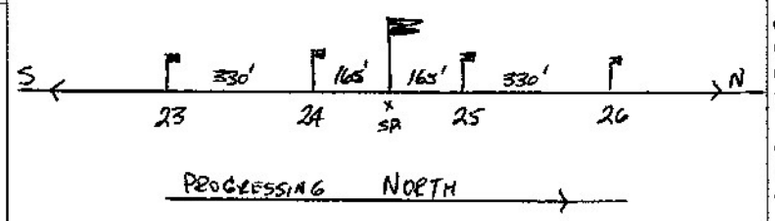

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 625 %
LOWER SET LIMIT 18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

F- 070 - 077 DRO
F- 0100 FILTER PULSE
F- 101 TTB

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R-4	NORTH SLOPE	ALASKA	USA	07:00	08:00	18:30	19:30	4-23-75	DOROSH.	1 OF 1

IDENTIFICATION				SHOT			SHOT					SPREAD						TAPE					GAIN								FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ	LOW CUT SLOPE	NOTCH IN / OUT	
19X	70	~~598~~ ~~515~~	146				1X100	60/90	2			S				1/1	1		✓		6		OPER.	42 60	48 60	54 60	60 54	60 48	60 42	90	FAST	60B	12A	8	36		#27-DEAD
	71		147				1X100	60/90	2							1/5																					—
	72		150				1X100	60/90	2							1/9																					
	73		151				1X100	60/90	2							1/13																					
	74		152				1X100	60/90	2							1/17																					
	75		153				1X100	60/90	2							1/21																					
	76		154				1X100	60/90	2							1/25																					
	77		155				1X100	60/90	2							1/29																					
	78	2	156				1X100	60/90	2		200S					1/33																					
	79	3	157				1X100	60/90	2							1/37																					
	80		160				1X100	60/90	2							1/41																					
	81	4	161				1X100	60/90	2							1/45																					
	82	5	162				1X100	60/90	2							1/49																					
	83		163				1X100	60/90	2		230'N					1/1	2																				#7-DEAD
	84		164				1X100	60/90	2							1/5																					#3- " & 1
	85		165				1X100	60/90	2							1/9																					—
	86		166				1X100	60/90	2							1/13																					
	87		167				1X100	60/90	2		165'N					1/17																					
TAPE CHANGE		~~648~~ ~~516~~																																			
	88		170				1X100	60/90	2							1/21							CHANNELS	1-12	AND	37-48		INVERTED	(2)								
	89		171				1X100	60/90	2							1/25																					
	90	6	172				1X100	60/90	2		165'S 100'E			NO WT.		1/29																					
	91	7	173				1X100	60/90	2							1/33																					
	92	8	174				1X100	60/90	2							1/37																					
	93	9	175				1X100	60/90	2							1/41																					
	94	5	176				1X100	60/90	2							1/45																					
	95	A	177				1X50	60/75	2		75'S					1/49									2 COMPARISON						5 HOTS		1X50 @ 75'			
	95	B	178				1X100	60/90	2							1/49																					
	95	C	201				1X50	60/75	2		75'N					1/49																					
	10S	9	25'	INLINE.			330'	48 GEP SPLIT 600%																													

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION



DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT .025 %
LOWER SET LIMIT .18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

F-134 — 143 DRD
F-144 FILTER PULSE.
F-145 TTB

PROGRESSING NORTH →

RECORDER FIELD DATA TI-13230-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
USN.	182	N.P.R-4	NORTH SLOPE	ALASKA	USA	07:00	08:00	19:30	20:30	4-24-75	DORESH.	1 OF 2

IDENTIFICATION				SHOT			SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19X	96	698	214				1400	45/75	2			S				1/1	1		✓		6		OPER.	42	41	54	60	60	60	90	FAST	608	124	8	36		
		216																						60	60	60	44	48	42								
	97		215				1400	60/90	2							1/5																					
	98		216				1400	60/90	2							1/9																					
	99		217				1400	60/90	2							1/13																					
	100	S	220				1400	60/90	2							1/17																					
	101		221				1400	60/90	2							1/21																					
	102		222				1400	60/90	2							1/25																					
	103		223				1400	60/90	2							1/29																					
	104		224				1400	60/90	2							1/33																					
	105		225				1400	60/90	2							1/37																					
	106		226				1400	60/90	2							1/41																					
	107		227				1400	60/90	2							1/45																					
	108		230				1400	60/90	2							1/49																					
TAPE	CHANGE.		231	W/ONES. (6 SEC).																																	
	109		232				1400	60/90	2							1/1	2																				#6 - DEAD.
	110	S	233				1400	60/90	2							1/5																					#2 - "
	111		234				1400	60/90	2							1/9																					#46 - "
	112		235				1400	60/90	2							1/13																					#42 - "
	113		236				1400	60/90	2							1/17																					#38 - "
	114		237				1400	60/90	2							1/21																					—
	115		240				1400	60/90	2							1/25																					
	116		241				1400	60/90	2							1/29																					
	117		242				1400	60/90	2							1/33																					
	118		243				1400	60/90	2							1/37																					
	119		244				1400	60/90	2							1/41																					
	120		245				1400	60/90	2							1/45																					
	121		246				1450	60/75	2							1/49																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	102	9	25'	INLINE	330'	48 CHA SPLIT. 600%

SHOT CONFIGURATION

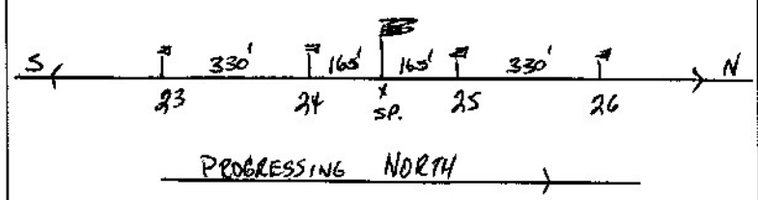

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

F-202 - 211 DRO
F-212 FILTER PULSE.
F-213 TTB.

RECORDER FIELD DATA TI-13239-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R.-4	NORTH SLOPE	ALASKA	USA					4-24-75	DOROSH	2 OF 2

IDENTIFICATION				SHOT			SPREAD						TAPE					GAIN										FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19X	122	~~698~~ ~~517~~	247				1X50	60/75	2			5				1/1	3		✓		6		OPER	42 60	48 62	54 60	60 54	60 48	60 42	90	FAST	60B	124	8	36		
	123	514397	250				1X50	60/75	2							1/1	4																				
	124		251				1X50	60/75	2							1/5																					
	125		252				1X50	60/75	2							1/9																					
	126		253				1X50	60/75	2							1/13																					
	127		254				1X50	60/75	2							1/17																					
	128		255				1X50	60/75	2							1/21																					
	129		256				1X50	60/75	2		600'N					1/25																					
	130		257				1X50	60/75	2							1/29																					
	131		260				1X50	60/75	2							1/33																					
TAPE CHANGE.																																					
	132	~~698~~ ~~518~~	261				1X50	60/75	2							1/37																					
	133	514398	262				1X50	60/75	2							1/41																					
	134		263				1X50	60/75	2							1/45																					
	135		264				1X50	60/75	2							1/49																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SAME AS PAGE ONE

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ ~~21~~ TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

RECORDER FIELD DATA TI-13236-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
U.S.N.	182	N.P.R-4	NORTH SLOPE	ALASKA	USA	07:00	07:30	17:30	18:00	4-25-75	DOROSH.	1 OF 1

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN								FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-15	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
19X	136	~~648~~ 514398	277				1X50	60/75	2			S				1/1	1		✓		6		OPER.	42 60	48 60	54 60	60 54	60 48	60 42	90	FAST	608	124	8	36		#3-0540
	137		300				1X50	60/75	2							1/5																					—
	138		301				1X50	60/75	2							1/9																					
	139		302				1X50	60/75	2							1/13																					
	140		303				1X50	60/75	2							1/17																					
	141		304				1X50	60/75	2							1/21																					
	142		305				1X50	60/75	2							1/25																					
	143		306				1X50	60/75	2							1/29																					
	144		307				1X50	60/75	2							1/33																					
	145		310				1X50	60/75	2							1/37																					
	146		311				1X50	60/75	2							1/41																					
	147		312				1X50	60/75	2							1/45																					
	148		313				1X50	60/75	2							1/49																					
	149		NR				—	—								1/1		SKIPPED - LAKE - DRILLS BROKE DOWN.																			
	150		N.R.				—	—								1/5																					
	151		314				1X50	60/75	2							1/9																					
	152		315				1X50	60/75	2							1/13																					
	153		316				1X50	60/75	2		500's					1/17																					
	154		NR.				—	—								1/21					"		"				"	"		"							
	155		N.R.				—	—								1/25																					
	156		317				1X50	60/75	2							1/29																					
TAPE CHANGE.		~~648~~ 514																																		
	157	514398	320				1X50	60/75	2							1/33																					
	158		321				1X50	60/75	2							1/37																					
	159		322				1X50	60/75	2							1/41																					
	160		323				1X50	60/75	2							1/45																					
	161		324				1X50	60/75	2		500's					1/49					~~SEA~~ END OF LINE 19X - TAPE CHANGE.															

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
	10Ω	9	25'	INLINE.	330'	48 GEO. SPLIT. 600%

SHOT CONFIGURATION

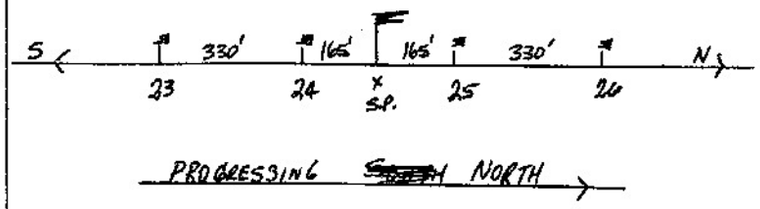

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 80 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE: TIAC
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 21 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

F-265-274 DRD
F-275 FILTER PULSE.
F-276 TTB.

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
USN.	182	N.P.R-4	NORTH SLOPE	ALASKA	USA -					4-26-75	DOROSH.	1 OF 1

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
																					- NO PRODUCTION TO-DAY.															
																					- CAMP MOVE TO L-76															
																					- WAIT ON SURVEYORS - DRILLS.															
																					- MAINTENANCE ON RECORDER, L-TRUCKS.															

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

☐ 9 TRACK ☐ 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION: