RECORDER FIELD DATA TI-1323B-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
NAVY	1182	NPR-4		ALASKA	A	7:00	8:00			3/4/76	R.H. Sherwood	

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL	PLAY BACK	TIME	SHOT SIZE	SHOT TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	SPREAD NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	TAPE SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN/OUT	REMARKS
121	1	543512	2221	A	R.A.W	10:30	45	70/90	2			S				1/25	1		✓		C	16+	AGC	54	54	54	48	42	36	90	FAST	C40	124	8	36	OUT	
	2		2222			10:40	50	75/90	2							1/29								36	42	48	54	54	54								
	3		2223			10:50	50	75/90	2							1/33								60	60	60	54	48	42								
	4		2224			11:00	50	65/90	2							1/37								42	48	54	60	60	60								Hole Blew
	5		2225			11:10	50	65/90	2							1/41																					Hole Blew.
	6		2226			11:20	50	65/90	2							1/45																					Trace #46 dead.
	7		2227			11:30	50	65/90	2							1/49																					
	8		2231			12:30	50	65/90	2							1/5	2																				
	9		2232			12:40	50	65/90	2							1/9																					
	10		2233			12:50	50	65/90	2							1/13																					
	11		2234			1:00	50	65/90	23							1/17																					
	12		2235			1:10	50	65/90	2							1/21																					
	13		2236			1:20	50	65/90	2							1/25																					
	14		2237			1:30	50	65/90	2							1/29																					
	15		2240			1:40	50	65/90	2							1/33																					Waiting on Rigs
	16		2241			1:50	50	65/90	2							1/37																					
	17		2243			2:40	50	65/90	2							1/1	3																				waiting on Rigs
	18		2244			2:50	50	65/90	2							1/5																					
	19		2245			3:00	50	65/90	2							1/9																					
	20		2246			3:10	50	65/90	2							1/13																					
	21		2247		—	3:20	25	~~75/90~~	2		63/75					1/17																					
	22		2250			3:30	50	65/90	2							1/21																					
	23		2251		—	3:40	25	~~75/90~~	2		63/75					1/25																					
	24		2252			3:50	50	65/90	2							1/29																					
	25		2253		—	4:00	25	~~75/90~~	2		63/75					1/33																					
	26		2254			4:10	50	65/90	2							1/37																					
	27		2255		—	4:20	25	~~75/90~~	2		63/75					1/41																					
	28		2256		—	5:30	25	~~75/90~~	2		63/75					1/45																					caught up to and waiting on Rigs, Recorder & amp. Layout in field,

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18. %

FORMAT TYPE:

☐ 9 TRACK ☑ 21 TRACK

GALVO LEVEL:

1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

2230 Pulse

2242 Pulse

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA					MAR 8/76	Vic Donald	1081

IDENTIFICATION							SHOT					SPREAD						TAPE				GAIN									FILTERS				
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	REMARKS
121	49	543513	2327	A	RAW		50	70/90	2	0		5	0			1/1	1		✓		6 sec		OP	60	60	60	54	48	42	120	FAST	640	64				NO UPHOLE - HOLE BLEW TA# 46 DEAD
	50		2330				50	70/90	2							1/5								42	48	54	60	60	60								TA# 42 DEAD
	51		2332				50	70/90	2							1/9																					
	52		2333				50	70/90	2							1/13																					
	53		2334				50	70/90	2							1/17																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0	D-20 10HZ	18	25'	INLINE	330'	INLINE 48 GROUPS 24/24 SPLIT NO GAP

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 625 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
☐ 9 TRACK ☑ 21 TRACK
GALVO LEVEL:
1-24 31 DB AUX 24 DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2315 → 2324 DRD
REC# 2325 PULSE TEST
REC# 2326 TEST TB
REC# 2331 " "
WHETHER DAY IN A.M.
ALTERNATOR TROUBLE WITH RECORDER.

RECORDER FIELD DATA TI 13239-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
NAVY	1182	NPR-4		ALASKA		7:00 AM	7:30 AM			3/5/76	[illegible]	

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS			REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN/OUT	Daily Tests 2257-2267
121	29	543512	2270	A	R.A.W	9:30	~~25~~	~~63/75~~	2			5				1/1	1		✓		6		HGC	40	60	60	54	48	42	90	~~FAST~~	240	124	8	36	OUT	~~2 setup or Right~~ -
	30		2271			9:40	25	78/90	2							1/5								42	48	54	60	60	60								only to Drills on line
	31		2272			9:50	50	65/90	2							1/9																					
	32		2273			10:00	50	65/90	2							1/13						7															
	33		2274			10:30	50	65/90	2							1/17																					
	34		2275			10:50	50	65/90	2							1/21																					2 setup 0 Reps.
	35		2276			11:30	50	65/90	2							1/25																					
	36		2277			11:50	25	63/75	2							1/29																					
	37		2301			1:10	50	65/90	2							1/1	2																				
	38		2302			1:20			2							1/5																					
	39		2303			1:30	50	65/90	2							1/9																					
	40		2304			1:40	50	65/90	2							1/13																					
	41		2305			2:30	50	65/90	2							1/17																					
	42		2306			2:40	50	65/90	2							1/21																					
	43		2307			3:00	50	65/90	2							1/25																					
	44		2300			3:10	50	65/90	2							1/29																					
	45		2311			3:40	50	65/90	2							1/1	3																				
	46		2312			3:50	50	65/90	2							1/5																					
	47		2313			4:00	50	65/90	2							1/9						ITB															
	48		2314			4:30	50	65/90	2							1/13						ITB															

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB

UPPER SET LIMIT 62.5 %

LOWER SET LIMIT 18 %

FORMAT TYPE:

☐ 9 TRACK ☒ 21 TRACK

GALVO LEVEL:

1-24 24 DB AUX 21 DB

OTHER:

MISCELLANEOUS INFORMATION:

2300 PULSE.

RECORDER FIELD DATA TI-13236-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA					MAR 3	Van Donald	1 of 2

IDENTIFICATION LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SHOT SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	SPREAD NO. 1 DIR.	CODE	S.P. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	TAPE SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN/OUT	REMARKS
121	54	543513	2347	A	RAW		50	70/90	2	0		5	1	5'		1/9	1		✓		6sec		OP	61	60	60	54	48	42	120	FAST	Auto 640	124	8	36	OUT	
	55		2350				50	70/90	2							1/13								42	48	54	60	60	60								
	56		2351				50	74/90	2		50'W					1/17																					
	57		2352				25	65/75	2							1/21																					
	58		2353				25	65/75	2							1/25																					
	59		2354				25	65/75	2							1/29																					
	60		2355				25	65/75	2							1/33																					
	61		2356				25	65/75	2							1/37																					TR#46 DEAD
	62		2360				25	65/75	2							1/5	2																				2ND GAP NORTH OF SP 62 DEAD FROM SP 62 → SP 68
	63		2361				25	65/75	2							1/9																					
	64		2362				25	65/75	2							1/13																					
	65		2363				25	65/75	2							1/17																					
	66		2364				25	65/75	2							1/21																					
	67		2365				25	65/75	2							1/25																					
	68		2366				25	65/75	2							1/29																					
	69		2367				25	65/75	2							1/33																					
	70		2371				25	65/75	2							1/17	3																				
	71		2372				25	65/75	2							1/21																					
	72		2373				25	65/75	2							1/25																					TR#40 DEAD
	73		2374				25	65/75	2							1/29																					TR#36 DEAD
	74		2375				25	65/75	2							1/33																					
	75		2377				25	65/75	2							1/39	4																				
	76		2400				25	65/75	2							1/13																~~544~~					
	77		2401				25	65/75	2							1/17																544					
	78		2402				25	65/75	2							1/21																576					
	79		2403				25	65/75	2							1/25																640					
	80		2404				50	55/75	2							1/29																					
	81		2406				25	65/75	2							1/33	5																				

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
1	D-20 10 Hz GEOSPACE	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP

SHOT CONFIGURATION

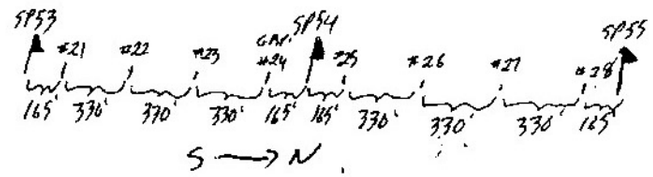

NO.1 ~~BARE~~ GROUP TO THE SOUTH PROGRESSING TO THE NORTH

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
☐ 9 TRACK ☑ 21 TRACK
GALVO LEVEL:
1-24 24 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2335-2344 PRO TEST
REC# 2345 PULSE TEST
REC# 2346 TEST T.B.
REC# 2357 PULSE TEST
REC# 2370 PULSE TEST
REC# 2376 PULSE TEST
REC# 2405 PULSE TEST

RECORDER FIELD DATA TI-1323B-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA	700	800	730	830	MAR 9/76	Vic Donald	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN									FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
121	82	543513	2407	A	BAM		25	65/75	2	1		5	D	5'		1/5	5		✓		6 SEC		OP	60	60	60	54	48	32	120	FAST	AUTO 640	124	8	36	OUT	
	83		2410				50	65/75	2							1/9																					
	84		2411				25	65/75	2							1/13																					
	85		2412				25	65/75	2							1/17																					
	86		2413				25	65/75	2							1/21																					
	87		2414				25	65/75	2							1/25																					
					TAPE		CHANGE																													

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SAME AS PAGE 1 OF 2

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

☐ 9 TRACK ☐ 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION:

SLOW GOING - DEEP SNOW AND CABLES BURIED IN SNOW

- ALTERNATOR BROKE ON RECORDER

RECORDER FIELD DATA TI 13230-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA	700	800	700	800	MAR 10/76	Vic Donald	1082

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SHOT SIZE	TOP / BOT	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	R. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ	LOW CUT SLOPE	NOTCH IN/OUT	REMARKS
121	88	543314	2415	A	RAW		25	65/75	2	1		5	1			1/9	1		✓		6 sec		OL	60	60	60	54	48	42	120	FAST	MATO 640	128	8	36	OUT	~~TR# 37 SHORTED~~
	89		2416				25	65/75	2							1/13								42	48	54	60	60	60								INITIAL GAINS ALL ON 60
	90		2417				25	65/75	2							1/17																					TR# 33 SHORTED
	91		2420				25	65/75	2							1/21																					TR# 29 SHORTED
	92		2421				25	65/75	2							1/25																					
	93		2422				25	65/75	2							1/29																					
	94		2423				50	70/90	2							1/33																					
	95		2424				50	70/90	2							1/37																					
	96		2426				50	70/90	2							1/17	2																				
	97		2427				50	70/90	2							1/21																					
	98		2430				50	70/90	2							1/25																					
	99		2432				50	70/90	2							1/29																					
	100		2433				50	70/90	2							1/33																					
	101		2434				50	70/90	2							1/37																					
	102		2436				50	70/90	2							1/17	3																				
	103		2437				50	70/90	2							1/~~17~~																608					
	104		2440				50	70/90	2							1/21																					
	105		2441				50	70/90	2							1/25																					
	106		2442				50	70/90	2							1/29																					
	107		2443				50	70/90	2							1/33																					
	108		2444				50	70/90	2							1/37																					
	109		2445				50	70/90	2							1/41																					
	110		2447				50	70/90	2							1/17	4																				
	111		2450				50	70/90	2							1/21																					
	112		2451				50	70/90	2							1/25																					
	113		2452				50	70/90	2							1/29																					
	114		2453				50	70/90	2							1/33																					
	115		2454				50	70/90	2							1/37																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
1	D-20 10 HZ GEO-SPACE	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP.

SHOT CONFIGURATION

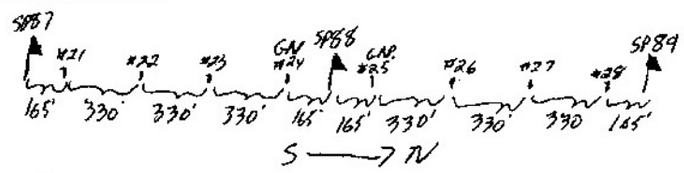

NO 1 GAP. TO THE SOUTH PROGRESSING TO THE NORTH

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
☐ 9 TRACK ☑ 21 TRACK
GALVO LEVEL:
1-24 24 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION: ~~UP~~ DAILY TESTS RAN ON ~~PAGE~~ SEPARATE TAPE FROM THIS DATE FORWARD.

REC# 2425 - PULSE TEST
REC# 2431 MISSFIRE
REC# 2435 PULSE TEST
REC# 2446 PULSE TEST

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA		700	800	700	800	MAR 10/76	Vic Donald	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE					GAIN										FILTERS				REMARKS
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	
121	116	543314	2455	A	RAW		50	70/90	2	1		5	1	5'		1/41	4		✓		6SEC		OP	60	60	60	54	48	42	120	FAST	AUTO 608	124	8	36	OUT	
	117		2458				50	70/90	2							1/17	5							42	48	54	60	60	60								
	118		2460				50	70/90	2							1/21																					
	119		2461				50	70/90	2							1/25																					
	120		2462				50	70/90	2							1/29																					
	121		2463				50	70/90	2							1/33																					
	122		2464				50	70/90	2							1/37																					
	123		2466				50	70/90	2							1/13	6																				
	124		2467				50	70/90	2							1/17																					
	125		2470				50	70/90	2							1/21																					
	126		2471				50	70/90	2							1/25																					
	127		2472				50	70/90	2							1/29																					
	128		2473				50	70/90	2							1/33																					

TAPE CHANGE

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SAME AS PAGE 1 of 2

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB
UPPER SET LIMIT _____ %
LOWER SET LIMIT _____ %
FORMAT TYPE:
☐ 9 TRACK ☐ 21 TRACK
GALVO LEVEL:
1-24 _____ DB AUX _____ DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2456 PULSE TEST
REC# 2465 PULSE TEST

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA	700	7:30	7:00	800	MAR 11/76	Vic Donald	1 of 2

LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL	PLAY BACK	TIME	SIZE	SHOT TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS. OFFSET	SEIS DEPTH	COP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	REMARKS
121	129	543515	2474	A	MAN		25	65/75	2	1		5	0	5'		1/5	1		✓		6SEC		OP	66	66	66	66	42	120	FAST	AUTO 608	124	8	36	OUT	
	130		2475				25	65/75	2							1/4								42	66	66	66	66	66								
	131		2476				25	65/75	2							1/13																					
	132		2477				25	65/75	2							1/17																					
	133		2500				25	65/75	2							1/21																					
	134		2501				25	65/75	2							1/25																					TA#45 DEAD
	135		2502				25	65/75	2							1/29																					TA#41 DEAD
	136		2504				25	65/75	2							1/33	2																				
	137		2505				25	65/75	2							1/9																					
	138		2506				25	65/75	2							1/13																					
	139		2507				25	65/75	2							1/17																					
	140		2510				25	65/75	2							1/31																					
	141		2511				50	70/90	2							1/25																					
	142		2512				~~25~~ 25	65/75	2							1/29																					
	143		2513				50	70/90	2							1/33																					
	144		2514				50	70/90	2							1/37								72	72	72	72	72	92								
	145		2515				25	65/75	2							1/41								42	72	72	72	72	72								
	146		2516				50	70/90	2							1/45																					NB 3 INP GRP NORTH OF SP 51 REV - ALL SHOTS EXCEPT SPS 54-75T
	147		2520				50	70/90	2							1/13	3																				TA#12 SHORTED
	148		2521				50	70/90	2							1/17																					TA#5 "
	149		2522				50	70/90	2							1/21																					TA#4 "
	150		2523				50	70/90	2							1/25																					
	151		2524				50	70/90	2							1/29																					
	152		2525				50	70/90	2							1/33																					
	153		2526				50	70/90	2							1/37																					
	154		2530				50	70/90	2							1/13	4																				
	155		2531				50	70/90	2							1/17																					
	156		2532				50	70/90	2							1/21																					

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
1	D-20 10 HZ GEOSPACE	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP

SHOT CONFIGURATION

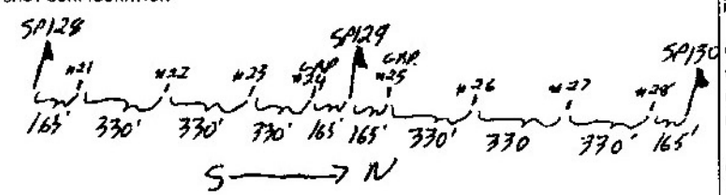

NO 1 GRP. TO THE SOUTH PROGRESSING TO THE NORTH

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 625 %
LOWER SET LIMIT 19 %
FORMAT TYPE: ☐ 9 TRACK ☐ 21 TRACK
GALVO LEVEL: 1-24 24 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2503 PULSE TEST
REC# 2517 PULSE TEST
REC# 2527 PULSE TEST

RECORDER FIELD DATA TI-1323B-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	WPR-4		ALASKA	USA	7:00	800	7:00	800	MAR 11/76	Vic Donald	2 of 2

IDENTIFICATION LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SHOT SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	SPREAD NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	TAPE RECORD LENGTH	PARITY ERRORS	GAIN MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	REMARKS
121	157	543515	2533	A	RAW		50	70/90	2	0		5	0	5'		1/25	①		✓		6SEC		OP.	72	72	72	72	72	42	120	FAST	AUTO 640	124	8	36	OUT	
	158		2534				50	70/90	2							1/29								42	72	72	72	72	72								
	159		2535				50	70/90	2							1/33																					
	160		2537				50	70/90	2							1/5	⑤																				
	161		2540				50	70/90	2							1/9																					
	162		2541				50	70/90	2							1/13																					
	163		2542				50	70/90	2							1/17																					
	164		2543				50	70/90	2							1/21								66	66	66	66	66	42								
	165		2544				50	70/90	2							1/25								42	66	66	66	66	66								
	166		2545				50	70/90	2							1/29																					
	167		2546				50	70/90	2		70'E					1/33																					
	168		2547				50	70/90	2		70'NW					1/37																					
	169		2550				50	70/90	2							1/41																					
	170		2551				50	70/90	2							1/45																					
							TAPE		CHANGE																											

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SAME AS PAGE 1 of 2

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

☐ 9 TRACK ☐ 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION:

REC# 2536 PULSE TEST

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4		ALASKA	USA	700	730	630	730	MAR 17/76	Vic Donald	1 of 2

IDENTIFICATION LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL	PLAY BACK	TIME	SHOT SIZE	TOP / BOT.	NO CAPS	CODE	S.P. OFFSET	SPREAD NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	TAPE SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	REMARKS
121	171	543516	2552	A	RAW		50	70/90	2	①		5	①	5'		1/9	①		✓		6sec		OP						120	FAST	AUTO 608	124	8	36	OUT	TR#17 SHORTED
	172		2553				50	70/90	2							1/13																				TR#13 "
	173		2554				50	70/90	2							1/17																				TR#9 "
	174		2555				50	70/90	2							1/21																				TR#5 "
	175		2556				50	70/90	2							1/25																				TR#1 "
	176		2557				50	70/90	2							1/29																				
	177		2560				50	70/90	2							1/33																				
	178		2561				50	70/90	2							1/37																				
	179		2562				25	65/75	2							1/41																				
	180		2563				25	65/75	2							1/45																				
	181		2564				25	65/75	2							1/49																				
	182		2566				25	65/75	2							1/13	②																			
	183		2567				25	65/75	2							1/17																				
	184		2570				25	65/75	2							1/21																				
	185		2571				25	65/75	2		75'E					1/25																				
	186		2572				25	65/75	2							1/29																				
	187		2573				25	65/75	2							1/33																				
	188		2574				25	65/75	2							1/37																				
	189		2576				25	65/75	2							1/15	③																			
	190		2577				25	65/75	2							1/9																				
	191		2600				25	65/75	2		50'W					1/13																				
	192		2601				25	65/75	2							1/17																				
	193		2602				25	65/75	2							1/21																				
	194		2603				25	65/75	2							1/25																				
	195		2604				25	65/75	2							1/29																				
	196		2605				25	65/75	2							1/33																				
	197		2606				25	65/75	2							1/37																				
	198		2610				25	65/75	2							1/21	④																			

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
①	0-20 10 HZ GEO-SPACE	18	25'	INLINE	330'	48 GROUPS INLINE 24/24 SPLIT NO GAP

SHOT CONFIGURATION

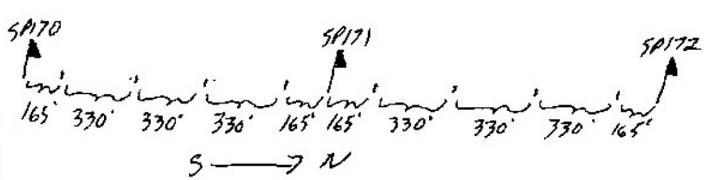

NO. 1 GAP TO THE SOUTH
PROGRESSING TO THE NORTH

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
☐ 9 TRACK ☐ 21 TRACK
GALVO LEVEL:
1-24 24 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2565 PULSE TEST
REC# 2575 PULSE TEST
REC# 2607 PULSE TEST

RECORDER FIELD DATA TI-13238-A

DFS III SYSTEM

CLIENT	PARTY NO	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1182	NPR-4	K	ALASKA	USA	700	730	630	730	MAR 12/76	Vic Donald	2 of 2

IDENTIFICATION							SHOT					SPREAD						TAPE				GAIN									FILTERS				
LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SIZE	TOP / BOT.	NO. CAPS	CODE	S.P. OFFSET	NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN / OUT	REMARKS
121	199	543516	2611	A	RAW		25	65/75	2	0		5	0	5'		1/25	0		✓		6SEC		OP	66	66	66	66	66	42	120	FAST	AUTO 60	129	8	36	OUT	
	200		2612				25	65/75	2							1/29								42	66	66	66	66	66								
	201		2613				25	65/75	2							1/33																				
	202		2614				25	65/75	2							1/37																				
	203		2615				25	65/75	2							1/41																				
	204		2616				25	65/75	2							1/45																				
				TAPE CHANGE																																

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN

SHOT CONFIGURATION

SAME AS PAGE 1 of 2

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT _____ DB

UPPER SET LIMIT _____ %

LOWER SET LIMIT _____ %

FORMAT TYPE:

☐ 9 TRACK ☐ 21 TRACK

GALVO LEVEL:

1-24 _____ DB AUX _____ DB

OTHER:

MISCELLANEOUS INFORMATION:

1 JUG TRUCK BROKEN DOWN

RECORDER FIELD DATA TI-13238-A

CLIENT	PARTY NO.	PROSPECT	COUNTY	STATE	COUNTRY	LEFT STORAGE	ARRIVED FIELD	LEFT FIELD	ARRIVED STORAGE	DATE	OBSERVER	PAGE
HUSKY	1162	NPR-4		ALASKA	USA	700	730	1:30	5:30	MAR 13/76	Vic Donald	1 of

IDENTIFICATION LINE	PROFILE	REEL NUMBER	FILE NUMBER	SHOT / CAL.	PLAY BACK	TIME	SHOT SIZE	TOP / BOT.	NO. CAPS	CODE	S.P. OFFSET	SPREAD NO. 1 DIR.	CODE	S.P. SEIS OFFSET	SEIS DEPTH	CDP SWITCH	SETUP	TAPE SAMPLE RATE MS 1	2	4	RECORD LENGTH	PARITY ERRORS	MODE	GAIN INITIAL GAIN (DB) 1-4/24	5-8	9-12	13-16	17-20	21-24	FINAL GAIN DB	RELEASE RATE	TRIP DELAY	FILTERS HIGH CUT FREQ.	LOW CUT FREQ.	LOW CUT SLOPE	NOTCH IN/OUT	REMARKS
121	205	543517	2617	A	RAW		25	65/75	2	0		5	0	5'		1/9	1		✓		6 sec		OP	66	66	66	66	66	42			512					
	206		2620				25	65/75	2							1/13																					
	207		2621				25	65/75	2							1/17																					
	208		2622				25	65/75	2							1/21																608					
	209		2623				25	65/75	2							1/25																					
	210		2625				25	65/75	2							1/9	2																				TR# 17 SHORTED
	211		2626				25	65/75	2							1/13																					TR# 13 "
	212		2627				25	65/75	2							1/17																					TR# 9 "
	213		2630				25	65/75	2							1/21																					TR# 5 "
	214		2631				25	65/75	2							1/25																					TR# 1 "
	215		2632				25	65/75	2							1/29								NO RAW PAPER RECORD DUE TO PAPER JAM													
	216		2633				25	65/75	2							1/33																					
	217		2634				25	65/75	2							1/37																					
	218		2636				25	65/75	2							1/41																					
	219		2637				25	65/75	2							1/45																					
	220		2640				25	65/75	2							1/49																					

TAPE CHANGE

END OF LINE 121 - COMPLETE PICKUP

SEISMOMETER AND SPREAD INFORMATION

CODE	SEIS. TYPE	NO./GP.	INT.	GROUP PATTERN	GP. INT.	SPREAD PATTERN
0	0-20 10 HZ	18	25	INLINE	330'	48 GRPS. INLINE 24/24 SPLIT NO GAP

SHOT CONFIGURATION

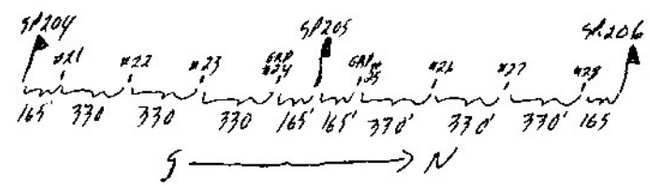

NO. 1 GAP TO THE SOUTH
PROGRESSING TO THE NORTH

DFS III SYSTEM PARAMETERS:

GAIN CONSTANT 30 DB
UPPER SET LIMIT 62.5 %
LOWER SET LIMIT 18 %
FORMAT TYPE:
☐ 9 TRACK ☒ 21 TRACK
GALVO LEVEL:
1-24 24 DB AUX 21 DB
OTHER:

MISCELLANEOUS INFORMATION:

REC# 2624 PULSE TEST
REC# 2635 MISSFIRE