LAND SEISMIC RECORDING LOG

CLIENT: HUSKY | PROSPECT: NPR 4 | AREA: KUK RIVER | LINE NO: 5

PARTY NO: 1182 | INST. ENG: W. WELCOME | 0700 – 0900 DRIVE TO LINE; INST. TESTS, CABLES + JUGS – 1330 – 2100 SHOOTING 2209N CAMP | DATE: MO 02 DAY 10 YR 77

INSTRUMENT (9-TRACK)

- [X] 1 SYSTEM [ ] 2 SYSTEMS
- [X] 1-24 & 25-48 [ ] 1-48 & 49-96
- [ ] ODDS & EVENS
- TYPE: [ ] DFS III [X] DFS IV [ ] DFS V [ ] OTHER
- [ ] 9 TRACK [X] 21 TRACK
- FORMAT: SEG
- [ ] GAPPED [ ] UNGAPPED
- PACKING DENSITY: (LO) [X] 356 BPI [ ] 800 BPI (HI) [ ] 712 BPI [ ] 1600 BPI
- NO. BYTES IN HEADER REC:
- NO. BYTES IN RECORD ID:
- NO. BYTES PER SCAN:
- RECORD NUMBERS: [ ] DEC. [X] OCT.
- GAIN CONSTANT: 30 db
- INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE)

- FIELD TRACE NOS.: 1 – 48
- DATA CHANNEL NOS.: 1 – 48 (ON MAG TAPE)
- AUXILIARY DATA: (1) FTB (2) (3) TWO (4) PBUH (5) PBTB (6) RHZ (7) RN
- AUXILIARY CHANNEL NOS.: 4 8 49 50 51 52

PARAMETER

- RECORD LENGTH: 6 sec.
- SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [X] 2 ms. [ ] ms.
- GAIN MODE: [X] IFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE
- FILTERS: FREQ. 8 LO CUT HZ SLOPE 36 FREQ. 124 HI CUT HZ SLOPE – NOTCH FILTER: [ ] IN [X] OUT

DISPLAY

- MODE: [X] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT
- INITIAL GAIN: 6 db
- TRIP SENS: 6 db
- POLARITY CONVENTION:
- PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [X] POSITIVE
- NUMBERS ON MAG. TAPE: [X] DOWNBREAK [ ] UPBREAK ON DISPLAY

CFS I

- TYPE STACK:
- GATE LENGTH:
- RECORD REJECTION:
- NOISE REDUCTION:
- NOISE THRESHOLD:
- CORR. SCALING:
- E.C.U. NORM/ALT SW.

SOURCE

- TYPE: [X] DYNAMITE [ ] VIBROSEIS [ ] OTHER
- PATTERN: SINGLE HOLE
- CHG/HOLE: 50
- HOLE DEPTH: 75
- NO. OF POSITIONS:
- INLINE SPACING:
- LATERAL SPACING:
- STAGGER:
- LENGTH:
- WIDTH:
- LATERAL OFFSET:
- SWEEP POSITION:
- SWEEP START:
- SWEEP END:
- SWEEP LENGTH:
- SWEEP TAPER:
- PHASE COMP:

RECEIVER

- TYPE:
- PATTERN: IN LINE
- NO. OF ELEMENTS:
- INCLINE SPACING:
- LATERAL SPACING:
- CONNECTION:
- RESISTANCE: ohms
- STAGGER:
- LENGTH:
- WIDTH:
- LATERAL OFFSET:

SPREAD

- NO. OF GROUPS: 48
- GROUP INTERVAL: 330
- SHOTPOINT INTERVAL: 1320
- FOLD: 6
- DIRECTION OF PROGRESSION: E
- OFFSET GROUP 1:
- OFFSET GROUP 24: 165
- OFFSET GROUP 25: 165
- OFFSET GROUP 48/96:
- LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:

SHOTPOINT	REF.	TR. 1 to 48 REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	CDP SWITCH	SPREAD LINE GROUPS	SET UP	REMARKS: RNS 0001 – 0020 USED FOR TESTS.	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
1132		3435	0021			50	75	01			1/1		1	TRACE 29 PARTLY DEAD / UHT 20MS				
1131			0022					02			1/5			UHT 17MS				
1130			0023					03			1/9			RECORD IN DEFLOAT – PB / UHT 15MS				
1129			0024					04			1/13			LOST MONITOR – P/B / UHT-17MS				
1128			0025					05			1/17			UHT-15MS				
1127			0026					06			1/21							
1126			0027					07			1/25			TRACE 5 DEAD / UHT-19MS				
1125			0030					08			1/29			" " / UHT-15MS				
1124			~~0031~~ 0032					09			1/33			RN 0031 NR / UHT-20MS				
1123			0033					10			1/37			UHT-17MS				
1122			0034					11			1/41			UHT-18MS				
1121			0035					12			1/45			TRACE 45 DEAD / UHT-16MS				
1120			0036					13			1/49			UHT-				
1119			0037					14			1/1		2	INST MOVE / UHT-17MS				
1118			0040					15			1/5			TRACE 48 DEAD / UHT-15MS				
1117			0041					16			1/9			TRACE 44 DEAD / UHT-14MS				
1116			0042					17			1/13			UHT-15MS				
1115			0043			50	75	18			1/17			TRACE 44 NOISY / UHT-15MS				
1114			0044			50	70	19			1/21			UHT-15MS				
1113			0045			50	65	20			1/25			UHT-15MS				

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY | PROSPECT: NPR 4 | AREA: KUK RIVER | LINE NO: 5

PARTY NO: 1182 | INST. ENG: W. WELCOME | DATE: MO 02 DAY 10 YR 77

INSTRUMENT (9-TRACK)
☒ 1 SYSTEM ☐ 2 SYSTEMS | ☒ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☒ DFS IV ☐ DFS V ☐ OTHER
☐ 9 TRACK ☒ 21 TRACK | FORMAT: SEG TIAC | ☐ GAPPED ☐ UNGAPPED | PACKING DENSITY: (LO) ☒ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI
NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: ☐ DEC. ☒ OCT. | GAIN CONSTANT: 30 db | INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE)
FIELD TRACE NOS.: 1-48
DATA CHANNEL NOS.: 1-48 (ON MAG TAPE)
AUXILIARY DATA: [1] FTB [2] [3] TWO [4] PBUH [5] PBTB [6] IKHZ [7] RN
AUXILIARY CHANNEL NOS.: 4 8 47 50 51 52

PARAMETER
RECORD LENGTH: 6 sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☒ 2 ms. ☐ ___ ms. | GAIN MODE: ☒ IPP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE | FILTERS: FREQ. 8 LO CUT HZ SLOPE 36 FREQ. 124 HI CUT HZ SLOPE — | NOTCH FILTER: ☐ IN ☒ OUT

DISPLAY
MODE: ☒ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT | INITIAL GAIN: 6 db | TRIP SENS: ___ db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☒ DOWNBREAK ☐ UPBREAK } ON DISPLAY

CFS I
TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW.

SOURCE
TYPE: ☒ DYNAMITE ☐ VIBROSEIS ☐ OTHER | PATTERN: SINGLE HOLE | NO. OF POSITIONS: | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:
CHG/HOLE: 50 | HOLE DEPTH: 75 | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP.:

RECEIVER
TYPE: | PATTERN: IN LINE | NO. OF ELEMENTS: | INCLINE SPACING: | LATERAL SPACING:
CONNECTION: | RESISTANCE: ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

SPREAD
NO. OF GROUPS: 48 | GROUP INTERVAL: 330 | SHOTPOINT INTERVAL: 1320 | FOLD: 6 | DIRECTION OF PROGRESSION: E
OFFSET GROUP 1: | OFFSET GROUP 24: 165 | OFFSET GROUP 25: 165 | OFFSET GROUP 48/96: | LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:

SHOTPOINT	REC.	TR. 1 to 48 REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	SPREAD CDP SWITCH	LINE GROUPS	SET UP	REMARKS	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
1112		5T4 35 36	00046			50	75	22			1/29		2	UHT-15MS				
1111			00047			50	75	22			1/33			UHT-15MS				
1110			00050			50	60	23	495	W	1/37			UHT-15MS				
1108			00051			50	75	24	495	E	1/45			SP 109 SKIPPED UHT-15MS				
1107			00052			50	75	25			1/49			TRACE 45 DEAD UHT-19MS				

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY
PROSPECT: KUK RIVER
AREA: PET 4
LINE NO: 05
PARTY NO: 112
INST. ENG: BLALOCK
0700 - 0900 DRIVE TO LINE
0900 - 1330 SHOOTER DUMBER DOWN
1330 - 2030 SHOOTING
2030 - 2230 DRIVE TO CAMP
DATE: MO 2 DAY 11 YR 92

INSTRUMENT (9-TRACK): ☐ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS; TYPE: ☐ DFS III ☒ DFS IV ☐ DFS V ☐ OTHER; ☐ 9 TRACK ☒ 21 TRACK; FORMAT SEG FIAC; ☐ GAPPED ☐ UNGAPPED; PACKING DENSITY: (LO) ☒ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC:
NO. BYTES IN RECORD ID:
NO. BYTES PER SCAN:
RECORD NUMBERS: ☐ DEC. ☒ OCT.
GAIN CONSTANT: 30 db
INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: 1-48; DATA CHANNEL NOS.: 1-48 (ON MAG TAPE)
AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)
AUXILIARY CHANNEL NOS.:

PARAMETER: RECORD LENGTH: 6 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☒ 2 ms. ☐ ms.; GAIN MODE: ☐ INITIAL ☐ MANUAL ☒ IFP ☐ FINAL ☐ OPERATE; FILTERS: FREQ. 8 LO CUT HZ SLOPE 36; FREQ. 124 HI CUT HZ SLOPE; NOTCH FILTER: ☐ IN ☒ OUT

DISPLAY: MODE: ☐ FLOAT ☐ AMPLIFIER ☒ AGC ☐ DEFLOAT ☐ DIRECT; INITIAL GAIN: 6 db; TRIP SENS: 6 db; POLARITY CONVENTION:; PRESSURE INCREASE ON GEOPHONE: ☒ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG. TAPE; ☒ DOWNBREAK ☐ UPBREAK } ON DISPLAY

CFS I: TYPE STACK:; GATE LENGTH:; RECORD REJECTION:; NOISE REDUCTION:; NOISE THRESHOLD:; CORR. SCALING:; R.C.U. NORM/ALT SW.

SOURCE: TYPE: ☒ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN:; NO. OF POSITIONS:; INLINE SPACING:; LATERAL SPACING:; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:
CHG/HOLE: 50; HOLE DEPTH: 75; SWEEP POSITION:; SWEEP START:; SWEEP END:; SWEEP LENGTH:; SWEEP TAPER:; PHASE COMP.:

RECEIVER: TYPE:; PATTERN:; NO. OF ELEMENTS:; INCLINE SPACING:; LATERAL SPACING:
CONNECTION:; RESISTANCE: ohms; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:

SPREAD: NO. OF GROUPS: 48; GROUP INTERVAL: 330; SHOTPOINT INTERVAL: 1320; FOLD: 6; DIRECTION OF PROGRESSION: E
OFFSET GROUP 1:; OFFSET GROUP ___:; OFFSET GROUP ___:; OFFSET GROUP 48/96:; LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:

SHOTPOINT (1-56)	BPI	TR. ___ to ___ REEL NO. (7-12)	REC. (13-16)	TR. ___ to ___ REEL NO. (17-22)	REC. (23-26)	SHOT SIZE (27-29)	DEPTH (30-32)	NO. (33-34)	OFFSET (35-37)	DIR.	SPREAD CDP SWITCH	LINE GROUPS	SET UP	REMARKS:	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
1106		5 4 3 5 6	1017			50	75	11		E	1/1		1	U/H 20' FROM HOLE (NOT ENOUGH WIRE)	U/H 15			
1105			1017			50	75	12			1/5			ON ALL SHOTS	UH 15			
1104			1017			50	75	13			1/9				UH 12			
1103			1017			50	75	14			1/13				UH 11			
1102			0716			50	75	15			1/17				UH 11			
1101			1017			50	75	16			1/21				UH 14			
1100			1100			50	75	17			1/25				UH 11			
99			1101			50	75	18			1/29				UH 15			
98			1102			50	75	19			1/33				UH 21			
97			1103			25	140	10			1/37				UH 10			
→		SHOT:	RAN	96	THR	UGE	90			NO	DRILL	DUE TO	KUK	RIVER				
88			1104			25	142	11			1/1		2		UH 15			
88			1105			50	75	12			1/5				UH 15			
87			1106			50	75	13			1/9				UH 14			

LAND SEISMIC RECORDING LOG

PAG #2

CLIENT: HUSKY	PROSPECT: KUK RIVER	AREA: PET 4	LINE NO: 05
PARTY NO: 182	INST. ENG: C. J. BLALOCK		DATE: MO 2 DAY 11 YR 92

INSTRUMENT (9-TRACK): ☐ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☐ DFS IX ☐ OTHER ____; ☐ 9 TRACK ☐ 21 TRACK; FORMAT: SEG ____ ☐ GAPPED ☐ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: ____ NO. BYTES IN RECORD ID: ____ NO. BYTES PER SCAN: ____ RECORD NUMBERS: ☐ DEC. ☐ OCT. GAIN CONSTANT: ____ db INPUT IMPEDANCE: ____ ohms.

(1) (2) (3) (4) (5) (6) (7)

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: ____ AUXILIARY DATA: ____

DATA CHANNEL NOS.: ____ (ON MAG TAPE) AUXILIARY CHANNEL NOS.: ____

PARAMETER: RECORD LENGTH: ____ sec. SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ____ ms. GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE FILTERS: FREQ. ____ LO CUT HZ SLOPE ____ FREQ. ____ HI CUT HZ SLOPE ____ NOTCH FILTER: ☐ IN ☐ OUT

DISPLAY: MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT INITIAL GAIN: ____ db TRIP SENS: ____ db POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE NUMBERS ON MAG. TAPE ☐ DOWNBREAK ☐ UPBREAK ON DISPLAY

CFS I: TYPE STACK: GATE LENGTH: RECORD REJECTION: NOISE REDUCTION: NOISE THRESHOLD: CORR. SCALING: R.C.U. NORM/ALT SW.

SOURCE: TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ PATTERN: NO. OF POSITIONS: INLINE SPACING: LATERAL SPACING: STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

CHG/HOLE: HOLE DEPTH: SWEEP POSITION: SWEEP START: SWEEP END: SWEEP LENGTH: SWEEP TAPER: PHASE COMP:

RECEIVER: TYPE: PATTERN: NO. OF ELEMENTS: INCLINE SPACING: LATERAL SPACING:

CONNECTION: RESISTANCE: ____ ohms STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

SPREAD: NO. OF GROUPS: GROUP INTERVAL: SHOTPOINT INTERVAL: FOLD: DIRECTION OF PROGRESSION:

OFFSET GROUP 1: OFFSET GROUP ____: OFFSET GROUP ____: OFFSET GROUP 48/96: LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

SHOTPOINT	TR. ____ to ____ REEL NO.	REC.	TR. ____ to ____ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	SPREAD CDP SWITCH	LINE GROUPS	SET UP	REMARKS		CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
1 5/6	7 12	13 16	17 22	23 26	27 29	30 32		33 37										
1086	14 13 15 6 17	101			50	05	14		E	1/13		2	NO UH	UH				
1085		102			50	05	15			1/17				UH 11				
1084		103			50	05	16			1/21				UH 13				
1083		104			50	05	17			1/25				UH 11				
1082		105			50	05	18			1/29				UH 11				
1081		106			50	05	19			1/33				UH 14				
1080		107			50	05	20			1/37				UH 12				
1079		110			50	05	21			1/41				UH 15				
1078		111			50	05	22			1/45				UH 16				
1077		112			50	05	23			1/49				UH 12				
1076		113			50	05	24			1/5		3	SP 25-36 REVERSED WITH 37-48 @ CDP SWITCH	UH 14				
1075		114			50	05	25			1/9				UH 10				
1074		115			50	05	26			1/13				UH 12				
1073		116			50	05	27			1/17				UH 17				
1072		117			50	05	28			1/21				UH 12				
1071		120			50	05	29			1/25				UH 16				
1070		121			50	05	30			1/29			RN 21 NR TRACE 25 DEAD	UH 15				
1069		122			50	05	31			1/33			RN 23 NR	UH 15				
1068		123			50	05	32			1/37				UH 15				
1067		124			50	05	33			1/41				UH 15				

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY | PROSPECT: NPR 4 | AREA: KUK RIVER | LINE NO: 05

PARTY NO: 1182 | INST. ENG: W. WELCOME | 1130 - 1730 PICKING UP CABLES ON L 7 - LAYOUT ON L 5 1800-2000 SHOOTING 2130 CAMP | DATE: MO 02 DAY 17 YR 77

INSTRUMENT (9-TRACK): [X] 1 SYSTEM [ ] 2 SYSTEMS | [X] 1-24 & 25-48 [ ] 1-48 & 49-96 | [ ] ODDS & EVENS | TYPE: [ ] DFS III [X] DFS IV [ ] DFS V [ ] OTHER ____ | [ ] 9 TRACK [X] 21 TRACK | FORMAT: TIAC SEG ____ | [ ] GAPPED [ ] UNGAPPED | PACKING DENSITY: (LO) [X] 356 BPI [ ] 800 BPI (HI) [ ] 712 BPI [ ] 1600 BPI

NO. BYTES IN HEADER REC: ____ | NO. BYTES IN RECORD ID: ____ | NO. BYTES PER SCAN: ____ | RECORD NUMBERS: [ ] DEC. [X] OCT. | GAIN CONSTANT: 30 db | INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: 1 - 48 | DATA CHANNEL NOS.: 1 - 48 (ON MAG TAPE)

AUXILIARY DATA: (1) FTB (2) UH (3) TWO (4) STB (5) SUH (6) RN (7) PIPPER

AUXILIARY CHANNEL NOS.: 4 6 8 49 50 51 52

PARAMETER: RECORD LENGTH: 6 sec. | SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [X] 2 ms. [ ] ____ ms. | GAIN MODE: [X] IFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE | FILTERS: FREQ. 8 LO CUT HZ SLOPE 36 | FREQ. 124 HI CUT HZ SLOPE ____ | NOTCH FILTER: [ ] IN [X] OUT

DISPLAY: MODE: [X] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT | INITIAL GAIN: 0 db | TRIP SENS: 6 db | POLARITY CONVENTION: ____ | PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [ ] POSITIVE } NUMBERS ON MAG. TAPE [X] DOWNBREAK [ ] UPBREAK } ON DISPLAY

CFS I: TYPE STACK: ____ | GATE LENGTH: ____ | RECORD REJECTION: ____ | NOISE REDUCTION: ____ | NOISE THRESHOLD: ____ | CORR. SCALING: ____ | R.C.U. NORM/ALT SW.

SOURCE: TYPE: [X] DYNAMITE [ ] VIBROSEIS [ ] OTHER ____ | PATTERN: SINGLE HOLE | CHG/HOLE: 50 | HOLE DEPTH: 75 | NO. OF POSITIONS: ____ | INLINE SPACING: ____ | LATERAL SPACING: ____ | STAGGER: ____ | LENGTH: ____ | WIDTH: ____ | LATERAL OFFSET: ____ | SWEEP POSITION: ____ | SWEEP START: ____ | SWEEP END: ____ | SWEEP LENGTH: ____ | SWEEP TAPER: ____ | PHASE COMP: ____

RECEIVER: TYPE: ____ | PATTERN: IN LINE | NO. OF ELEMENTS: ____ | INCLINE SPACING: ____ | LATERAL SPACING: ____ | CONNECTION: ____ | RESISTANCE: ____ ohms | STAGGER: ____ | LENGTH: ____ | WIDTH: ____ | LATERAL OFFSET: ____

SPREAD: NO. OF GROUPS: 48 | GROUP INTERVAL: 330 | SHOTPOINT INTERVAL: 1320 | FOLD: 6 | DIRECTION OF PROGRESSION: E | OFFSET GROUP 1: ____ | OFFSET GROUP ____: ____ | OFFSET GROUP ____: ____ | OFFSET GROUP 48/96: ____ | LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:

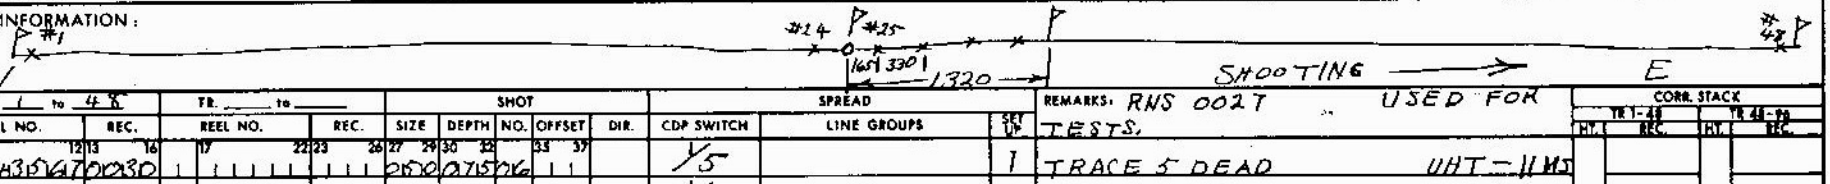

SHOTPOINT	REF.	TR. 1 to 48: REEL NO.	REC.	TR. ____ to ____: REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	CDP SWITCH	LINE GROUPS	SET UP	REMARKS: RNS 0027 USED FOR TESTS.	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
1 3 6		7 12 13 16		17 22 23 26		27 29 30 32			33 37									
616		3435 67	00030			0150	0715	016			1/5		1	TRACE 5 DEAD UHT - 11 MS				
615			00031					017			1/9			TRACE 1 DEAD UHT - 18 MS				
614			00032					018			1/13			TRACE 13 PARTLY DEAD. UHT - 14 MS				
613			00033					019			1/17			TRACE 9 PARTLY DEAD. UHT - 15 MS				
612			00034					110			1/21			TRACE 5 WEAK. UHT (RADIO) - 12 MS				
611			00035					111			1/25			TRACE 1 DEAD UHT (RADIO) - 12 MS				
610			00036					112			1/29			UHT 12 MS				
609			00037					113			1/33			UHT 13 MS				

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY	PROSPECT: NPR 4	AREA: KUK RIVER	LINE NO: KD05
PARTY NO: 1182	INST. ENG: W. WELCOME	0700-1000 DRIVE TO LINE; CABLES + JUGS - LYOT SPREAD; 1100-1730 SHOOTING 1900 CAMP	DATE: MO 02 DAY 18 YR 77

INSTRUMENT (9-TRACK): ☒ 1 SYSTEM ☐ 2 SYSTEMS; ☒ 1-24 & 25-48 ☐ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☒ DFS IV ☐ DFS V ☐ OTHER; ☐ 9 TRACK ☒ 21 TRACK; FORMAT: TIAC; SEG: ☐ GAPPED ☐ UNGAPPED; PACKING DENSITY: (LO) ☒ 556 BPI ☐ 800 BPI; (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: ; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: ; RECORD NUMBERS: ☐ DEC. ☒ OCT.; GAIN CONSTANT: 30 db; INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: 1 - 48; DATA CHANNEL NOS.: 1 - 48 (ON MAG TAPE)

AUXILIARY DATA: (1) FTB (2) UH (3) [redacted] (4) STB (5) (6) RN (7) PIPPER

AUXILIARY CHANNEL NOS.: 4 6 8 49 [redacted] 51 52

PARAMETER: RECORD LENGTH: 6 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☒ 2 ms. ☐ ___ ms.; GAIN MODE: ☒ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE; FILTERS: FREQ. [illegible] 8; LO CUT HZ SLOPE 36; HI CUT FREQ. 124 HZ SLOPE —; NOTCH FILTER: ☐ IN ☒ OUT

DISPLAY: MODE: ☒ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT; INITIAL GAIN: 0 db; TRIP SENS: 6 db; POLARITY CONVENTION: ; PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE; NUMBERS ON MAG. TAPE / ON DISPLAY: ☒ DOWNBREAK ☐ UPBREAK

CFS I: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; R.C.U. NORM/ALT SW.

SOURCE: TYPE: ☒ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: ☒ SINGLE HOLE; NO. OF POSITIONS: ; INLINE SPACING: ; LATERAL SPACING: ; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ; CHG/HOLE: 50; HOLE DEPTH: 75; SWEEP POSITION: ; SWEEP START: ; SWEEP END: ; SWEEP LENGTH: ; SWEEP TAPER: ; PHASE COMP:

RECEIVER: TYPE: 20 D; PATTERN: IN LINE; NO. OF ELEMENTS: 18; INCLINE SPACING: ; LATERAL SPACING: ; CONNECTION: SERIES PARALLEL; RESISTANCE: 500 ohms; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET:

SPREAD: NO. OF GROUPS: 48; GROUP INTERVAL: 330; SHOTPOINT INTERVAL: 1320; FOLD: 6; DIRECTION OF PROGRESSION: E; OFFSET GROUP 1: ; OFFSET GROUP 24: 165; OFFSET GROUP 25: 165; OFFSET GROUP 48/96: ; LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:



SHOTPOINT	TR. ___ to ___ REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	CDP SWITCH	LINE GROUPS	SET UP	REMARKS: RNS 0040 - 0057 USED FOR TESTS		CORR. STACK TR 1-48 HT.	REC.	TR 48-96 HT.	REC.
1 516	7 12 13 16		17 22	23 26	27 29	30 32		33 37										
518	5743 5767	00060			050	175	01			1/1		1	TRACE 6 DEAD	UHT-17MS				
517		00061			150	175	02			1/5			TRACE 2 DEAD	UHT-16MS				
516		00062			150	175	03			1/9				UHT-15MS				
515		00063			150	175	04			1/13			TRACE 41 DEAD	UHT-20MS				
514		00064			150	175	05			1/17				UHT-16MS				
513		00065			150	175	06			1/21				UHT-13MS				
512		00066			150	175	07			1/25				UHT-17MS				
511		00067			150	175	08			1/29				UHT-14MS				
510		00070			150	175	09			1/33				UHT-15MS				
49		00071			150	175	10			1/37			SHORT MON-DPB NO. [redacted] UH	UHT- —				
48		00072			150	175	11			1/41			TRACE 45 DEAD.	UHT-16MS				
47		00073			150	175	12			1/45			TRACE 41 DEAD.	UHT-16MS				
46		00074			150	175	13			1/49				UHT-16MS				
45		00075			150	175	14			1/1		2	MVINST	UHT-11MS				
44		01076			150	175	15			1/5				UHT-12MS				
43		~~00077~~ 0100			150	175	16			1/9			RN 0077 NR/TRACE 21 DOA	UHT-13MS				
													REEL CHANGE					
42	5743 5770	00002			150	175	17			1/13			RN 0001 NR. TRACE 17 DEAD	UHT-11MS				
41		00003			150	175	18			1/17			TRACE 13 DEAD	UHT-12MS				
40		00004			150	175	19			1/21			TRACE 9 DEAD	UHT-15MS				

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY	PROSPECT: NPR 4	AREA: KUK RIVER	LINE NO: KD. 05
PARTY NO: 1182	INST. ENG: W. WELCOME		DATE: MO 02 DAY 18 YR 77

INSTRUMENT (9-TRACK)
- [x] 1 SYSTEM [ ] 2 SYSTEMS
- [x] 1-24 & 25-48 [ ] 1-48 & 49-96 [ ] ODDS & EVENS
- TYPE: [ ] DFS III [x] DFS IV [ ] DFS V [ ] OTHER
- [ ] 9 TRACK [x] 21 TRACK
- FORMAT: SEG TIAC [ ] GAPPED [ ] UNGAPPED
- PACKING DENSITY: (LO) [x] 356 BPI [ ] 800 BPI (HI) [ ] 712 BPI [ ] 1600 BPI
- NO. BYTES IN HEADER REC:
- NO. BYTES IN RECORD ID:
- NO. BYTES PER SCAN:
- RECORD NUMBERS: [ ] DEC. [x] OCT.
- GAIN CONSTANT: 30 db
- INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE)
- FIELD TRACE NOS.: 1 – 48
- DATA CHANNEL NOS.: 1 – 48 (ON MAG TAPE)
- AUXILIARY DATA: (1) FTB (2) UH (3) TWO (4) STB (5) (6) RN (7) 1KHZ
- AUXILIARY CHANNEL NOS.: 4 6 8 49 51 52

PARAMETER
- RECORD LENGTH: 6 sec.
- SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [x] 2 ms. [ ] ms.
- GAIN MODE: [x] IFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE
- FILTERS: FREQ. 8 LO CUT HZ SLOPE 36 FREQ. 124 HI CUT HZ SLOPE
- NOTCH FILTER: [ ] IN [x] OUT

DISPLAY
- MODE: [x] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT
- INITIAL GAIN: 0 db
- TRIP-SENS: 6 db
- POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [ ] POSITIVE } NUMBERS ON MAG. TAPE [x] DOWNBREAK [ ] UPBREAK } ON DISPLAY

CFS I
- TYPE STACK:
- GATE LENGTH:
- RECORD REJECTION:
- NOISE REDUCTION:
- NOISE THRESHOLD:
- CORR. SCALING:
- R.C.U. NORM/ALT SW.

SOURCE
- TYPE: [x] DYNAMITE [ ] VIBROSEIS [ ] OTHER
- PATTERN: IN LINE
- CHG/HOLE: 50
- HOLE DEPTH: 75
- NO. OF POSITIONS:
- SWEEP POSITION:
- INLINE SPACING:
- SWEEP START:
- LATERAL SPACING:
- SWEEP END:
- STAGGER:
- SWEEP LENGTH:
- LENGTH:
- SWEEP TAPER:
- WIDTH:
- PHASE COMP:
- LATERAL OFFSET:

RECEIVER
- TYPE: 200
- CONNECTION: S/P
- PATTERN: IN LINE
- RESISTANCE: 500 ohms
- NO. OF ELEMENTS: 18
- STAGGER:
- INCLINE SPACING:
- LENGTH:
- LATERAL SPACING:
- WIDTH:
- LATERAL OFFSET:

SPREAD
- NO. OF GROUPS: 48
- OFFSET GROUP 1:
- GROUP INTERVAL: 330
- OFFSET GROUP 24: 165
- SHOTPOINT INTERVAL: 1320
- OFFSET GROUP 25: 165
- FOLD: 6
- OFFSET GROUP 48/96:
- DIRECTION OF PROGRESSION: E
- LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:



SHOTPOINT	TR. 1 to 48 REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	SPREAD CDP SWITCH	LINE GROUPS	SET UP	REMARKS:	CORR. STACK TR 1-48 HT.	REC.	TR 48-96 HT.	REC.
39	543570	0005			050	075	20			1/25		2	BAD GROUP FIXED UHT-17MS				
38		0006			050	075	21			1/29			UHT-17MS				

LAND SEISMIC RECORDING LOG

CLIENT:	HUSKY OIL
PROSPECT:	NPR 4
AREA:	KUK RIVER
LINE NO:	05
PARTY NO:	1182
INST. ENG:	W. WELCOME
	0700-0800 DRIVE TO LINE; CABLES + JUGS, TESTS, ETC; 0900-1930 SHOOTING, PICKUP 2200-2400 TIL
DATE:	MO 2 DAY 20 YR 77

INSTRUMENT (9-TRACK): [X] 1 SYSTEM [ ] 2 SYSTEMS; [X] 1-24 & 25-48 [ ] 1-48 & 49-96 [ ] ODDS & EVENS; TYPE: [ ] DFS III [ ] DFS IV [X] DFS IV [ ] OTHER; [ ] 9 TRACK [X] 21 TRACK; FORMAT: TIAC; SEG; [ ] GAPPED [ ] UNGAPPED; PACKING DENSITY: (LO) [X] 556 BPI [ ] 800 BPI (HI) [ ] 712 BPI [ ] 1600 BPI

NO. BYTES IN HEADER REC: ; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: ; RECORD NUMBERS: [ ] DEC. [X] OCT.; GAIN CONSTANT: 30 db; INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: 1 - 48; DATA CHANNEL NOS.: 1 - 48 (ON MAG TAPE)

AUXILIARY DATA: (1) FTB (2) TWO (3) RAW SIM (4) RAW RTB (5) RAW UH (6) RASIM (7) REF TB RN 54

AUXILIARY CHANNEL NOS.: 4 8 49 50 51 52 53

PARAMETER: RECORD LENGTH: 6 sec.; SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [X] 2 ms. [ ] ms.; GAIN MODE: [X] IFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE; FILTERS: FREQ. 8; LO CUT HZ SLOPE 36; FREQ. 124; HI CUT HZ SLOPE; NOTCH FILTER: [ ] IN [X] OUT

DISPLAY: MODE: [X] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT; INITIAL GAIN: 0 db; TRIP SENS: 6 db; POLARITY CONVENTION: ; PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [ ] POSITIVE; NUMBERS ON MAG. TAPE [X] DOWNBREAK [ ] UPBREAK ON DISPLAY

CFS I: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; R.C.U. NORM/ALT SW.

SOURCE: TYPE: [X] DYNAMITE [ ] VIBROSEIS [ ] OTHER; PATTERN: SINGLE HOLE; CHG/HOLE: 50; HOLE DEPTH: 75; NO. OF POSITIONS: ; INLINE SPACING: ; LATERAL SPACING: ; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ; SWEEP POSITION: ; SWEEP START: ; SWEEP END: ; SWEEP LENGTH: ; SWEEP TAPER: ; PHASE COMP:

RECEIVER: TYPE: GS 20 D; PATTERN: IN LINE; NO. OF ELEMENTS: 18; INCLINE SPACING: ; LATERAL SPACING: ; CONNECTION: S/P; RESISTANCE: 500 ohms; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET:

SPREAD: NO. OF GROUPS: 48; GROUP INTERVAL: 330; SHOTPOINT INTERVAL: 1320; FOLD: 6; DIRECTION OF PROGRESSION: E; OFFSET GROUP 1: ; OFFSET GROUP 24: 165; OFFSET GROUP 25: 165; OFFSET GROUP 48/96: ; LEADING GROUP: 48

DIAGRAMS/MISC. INFORMATION:

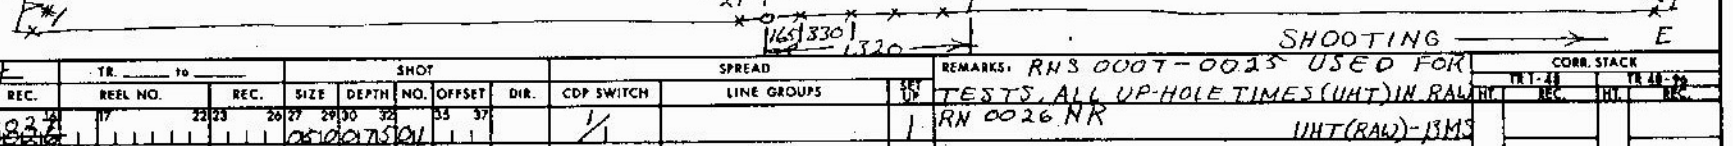

SHOTPOINT	TR. 1 to 4 REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	SPREAD CDP SWITCH	LINE GROUPS	SET UP	REMARKS: RNS 0007-0025 USED FOR TESTS, ALL UP-HOLE TIMES (UHT) IN RAW	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
317	0435	0029			150	175	01			1/1		1	RN 0026 NR				
316		0030			150	175	02			1/5			UHT(RAW)-13MS				
315		0031			150	175	03			1/9			UHT - 18MS				
314		0032			150	175	04			1/13			TRACE 11 PARTLY DEAD UHT - 13MS				
313		0035			150	175	05			1/17			SOME ONE KEY RADIO MIKE DURING SHOT UHT - 16MS				
312		0036			150	175	06			1/21			RNS 0033, 0034 NR UHT-15MS				
311		0037			150	175	07			1/25			UHT-15MS				
310		0040			150	175	08			1/29			UHT-13MS				
309		0041			150	175	09			1/33			UHT-16MS				
308		0042			150	175	10			1/37			TRACE 48 DEAD. NO SPS				
307		0043			150	175	11			1/41			UHT-15MS				
306		0044			150	175	12			1/45			UHT-15MS				
305		0045			150	175	13			1/49			UHT-15MS				
304		0046			150	175	14			1/1			UHT-23MS				
303		0047			150	175	15			1/5		2	LONG UHT MV INST. TRACE 16 DEAD; *1 NOISY. UHT-17MS				
302		0050			150	175	16			1/9			TRACE 7 DEAD UHT-20MS				
301		0051			150	175	17			1/13			TRACE 3 DEAD. TRACES 44 + 45 NOISY - SURVEYOR UHT-18MS				
300		0053			150	175	18			1/17			TRACE 21 DEAD UHT-14MS				
299		0054			150	175	19			1/21			TRACE 11 DEAD. RN 0052 NR UHT-16MS				
298		0055			150	175	20			1/25			TRACE 13 DEAD UHT-14MS				
													TRACE 9 DEAD UHT-16MS				

June 05 1182

LAND SEISMIC RECORDING LOG

CLIENT: HUSKY OIL | PROSPECT: NPR 4 | AREA: KUK RIVER | LINE NO: 05

PARTY NO: 1182 | INST. ENG: W. WELCOME | 1330–1630 CABLES 1700–1800 – INST MV. 1930 FINISHED LINE – PICKUP 2200–2400 DR. TO CAMP | DATE: MO 02 DAY 20 YR 77

INSTRUMENT (9-TRACK): [X] 1 SYSTEM [ ] 2 SYSTEMS | [X] 1-24 & 25-48 [ ] 1-48 & 49-96 | [ ] ODDS & EVENS | TYPE: [ ] DFS III [X] DFS IV [ ] DFS V [ ] OTHER | [ ] 9 TRACK [X] 21 TRACK | FORMAT: TIAC SEG | [ ] GAPPED [ ] UNGAPPED | PACKING DENSITY: (LO) [X] 356 BPI [ ] 800 BPI (HI) [ ] 712 BPI [ ] 1600 BPI

NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: [ ] DEC. [X] OCT. | GAIN CONSTANT: 30 db | INPUT IMPEDANCE: 500 ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: 1–48 | DATA CHANNEL NOS.: 1–48 (ON MAG TAPE)

AUXILIARY DATA: (1) TWO (2) RAWSUM (3) RAWRTB (4) RAWSPS (5) RAWIM (6) REFTB (7) RN

AUXILIARY CHANNEL NOS.: 8 49 50 51 52 53 54

PARAMETER: RECORD LENGTH: 6 sec. | SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [X] 2 ms. [ ] ___ ms. | GAIN MODE: [X] IFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE | FILTERS: FREQ. 8 LO CUT HZ SLOPE 36 | FREQ. 124 HI CUT HZ SLOPE ___ | NOTCH FILTER: [ ] IN [X] OUT

DISPLAY: MODE: [X] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT | INITIAL GAIN: 0 db | TRIP SENS: 6 db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [ ] POSITIVE | NUMBERS ON MAG. TAPE [X] DOWNBREAK [ ] UPBREAK } ON DISPLAY

CFS I: TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW.

SOURCE: TYPE: [X] DYNAMITE [ ] VIBROSEIS [ ] OTHER | PATTERN: SINGLE HOLE | CHG/HOLE: 60 | HOLE DEPTH: 75 | NO. OF POSITIONS: | SWEEP POSITION: | INLINE SPACING: | SWEEP START: | LATERAL SPACING: | SWEEP END: | STAGGER: | SWEEP LENGTH: | LENGTH: | SWEEP TAPER: | WIDTH: | PHASE COMP: | LATERAL OFFSET:

RECEIVER: TYPE: GS 20 D | CONNECTION: S/P | PATTERN: IN LINE | RESISTANCE: 500 ohms | NO. OF ELEMENTS: 18 | STAGGER: | INCLINE SPACING: | LENGTH: | LATERAL SPACING: | WIDTH: | LATERAL OFFSET:

SPREAD: NO. OF GROUPS: 48 | OFFSET GROUP 1: | GROUP INTERVAL: 330 | OFFSET GROUP 24: 165 | SHOTPOINT INTERVAL: 1320 | OFFSET GROUP 48: 165 | FOLD: 6 | OFFSET GROUP 48/96: | DIRECTION OF PROGRESSION: E | LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:



SHOTPOINT	TR. 1 to 48 REEL NO.	REC.	TR. ___ to ___ REEL NO.	REC.	SHOT SIZE	DEPTH	NO.	OFFSET	DIR.	CDP SWITCH	LINE GROUPS	SET UP	REMARKS: ALL SPS TIMES (UHT) IN RAW	CORR. STACK TR 1-48 HT.	REC.	TR 49-96 HT.	REC.
118	5743 5710	0056			500	0750	21			1/29		2	TRACE 5 DEAD. UHT-15MS				
116		0057			150	1750	22			1/33			TRACE 1 DEAD UHT-16MS				
115		0060			150	1750	23			1/37			UHT-13MS				
114		0061			150	1750	24			1/41			UHT-15MS				
113		0062			150	1750	25			1/45			UHT-15MS				
112		0063			150	1750	26			1/49			TRACE 21 DEAD UHT-18MS				
111		0064			150	1750	27			1/9		3	INST MV RNS 0064, 0065 & 0066 NR DEAD SPS UHT-20MS				
110		0070			150	1750	28			1/13			TRACE 21 DEAD UHT-13MS				
09		0071			150	1750	29			1/17			UHT-12MS				
08		0072			150	1750	30			1/21			UHT-14MS				
07		0073			150	1750	31			1/25			UHT-17MS				
06		0074			150	1750	32			1/29			UHT-13MS				
05		0076			150	1750	33			1/33			RN 0075 NR UHT-13MS				
04		0077			150	1750	34			1/37			RN 0077 NR UHT-16MS				
03		0100			150	1750	35			1/41			TRACE 45 DEAD. TRACES 8 & 9 NOISY-VEHICAL UHT-13MS				
02		0103			150	1750	36			1/45			5 SEC RECORD TRACES 41 & 47 DEAD UHT-18MS				
													REEL CHANGE				
01	5486 7110	0002			150	1750	37			1/49			RN 0001 NR TRACE 37 PARTLY DEAD UHT-17MS				
													E.O.L.				

PRINTED IN CANADA