# LAND SEISMIC RECORDING LOG

1

| | |
|---|---|
| CLIENT: | HUSKY |
| PROSPECT: | DRIFTWOOD |
| AREA: | NPR-A ALASKA |
| LINE NO: | 137X |
| PARTY NO: | 1186 |
| INST. ENG: | REID |
| DATE: | MO 4 DAY 21 YR 78 |

**INSTRUMENT (9-TRACK)**

☐ 1 SYSTEM ☐ 2 SYSTEMS ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS

TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER

☑ 9 TRACK ☐ 21 TRACK FORMAT: SEG B ☐ GAPPED ☑ UNGAPPED PACKING DENSITY: (LO) ☐ 556 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128 NO. BYTES IN RECORD ID: NO. BYTES PER SCAN: 254

RECORD NUMBERS: ☑ DEC ☐ OCT GAIN CONSTANT: 36 db INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**

FIELD TRACE NOS.: 1-96 (1) (2) (3) (4) (5) (6) (7)

DATA CHANNEL NOS.: 1-96 (ON MAG TAPE)

AUXILIARY DATA:

AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**

RECORD LENGTH: 8 sec. SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms. GAIN MODE: ☐ TFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE FILTERS: FREQ. 9 LO CUT HZ SLOPE 18 FREQ. 128 HI CUT HZ SLOPE 72 NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**

MODE: ☑ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT INITIAL GAIN: 42 db TRIP SENS: 18 db POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☑ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☑ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**

TYPE STACK: GATE LENGTH: RECORD REJECTION: NOISE REDUCTION: NOISE THRESHOLD: CORR. SCALING: R.C.U. NORM./ALT SW.

**SOURCE**

TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER PATTERN: SINGLE HOLE NO. OF POSITIONS: 1 INLINE SPACING: LATERAL SPACING: STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

CHG/HOLE: 110 HOLE DEPTH: 105 SWEEP POSITION: SWEEP START: SWEEP END: SWEEP LENGTH: SWEEP TAPER: PHASE COMP:

**RECEIVER**

TYPE: GSC 20D PATTERN: INLINE NO. OF ELEMENTS: 18 INLINE SPACING: 18 LATERAL SPACING:

CONNECTION: 2 (3x3) RESISTANCE: 240 ohms STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

**SPREAD**

NO. OF GROUPS: 96 GROUP INTERVAL: 220 SHOTPOINT INTERVAL: 880 FOLD: 12 DIRECTION OF PROGRESSION: NORTH

OFFSET GROUP 1: 10450 OFFSET GROUP 48: 110 OFFSET GROUP 49: 110 OFFSET GROUP 48/96: 10450 LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:




| SHOTPOINT | REF. | TR ___ to ___ REEL NO. | REC. | TR ___ to ___ REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR | SPREAD CDP SWITCH | #1 LINE GROUPS #96 | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 5100 | | 6T29814 | V12 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | 5/2 | F# 01 -> TESTS | | | | |
| 5101 | | | V13 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | TR# 33 BAD | | | | |
| 5102 | | | V14 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | | | | | |
| 5103 | | | V15 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | | | | | |
| 5104 | | | V16 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | | | | | |
| 5105 | | | V17 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | | | | | |
| 5106 | | | V18 | | | NO | 105 | | | | 49 | 517-4 | TS 24 | | | | | | |
| 5107 | | | V19 | | | NO | 105 | | | | 45 | 518-4 | TS 20 | | | | | | |
| 5108 | | | V20 | | | NO | 105 | | | | 41 | 519-4 | TS 16 | | | | | | |
| 5109 | | | V21 | | | NO | 105 | | | | 37 | 520-4 | TS 12 | | | | | | |
| 5110 | | | V22 | | | NO | 105 | | | | 33 | 521-4 | TS 8 | | | | | | |
| 5111 | | | V23 | | | NO | 105 | | | | 29 | 522-4 | TS-4 | | | | | | |
| 5112 | | | V24 | | | NO | 105 | | | | 25 | 523-4 | 500-1 | | | | | | |
| 5113 | | | V25 | | | NO | 105 | | | | 21 | 524-4 | 501-1 | | WRONG CDP POSITION | | | | |
| 5114 | | | V26 | | | NO | 105 | | | | 17 | 525-4 | 502-1 | | | | | | |
| 5115 | | | V27 | | | NO | 105 | | | | 13 | 526-4 | 503-1 | | | | | | |
| 5116 | | | V28 | | | NO | 105 | | | | 9 | 527-4 | 504-1 | | | | | | |
| | | | TAPE | CHANGE | | | | | | | 47 | 528-4 | 505-1 | 528-2 | | | | | |
| | | 6T29814 | V29 | | | | | | | | | | | | DUMMY RECORD | | | | |
| 5117 | | | V30 | | | NO | 105 | | | | 47 | 528-4 | 505-1 | 528-2 | | | | | |

# LAND SEISMIC RECORDING LOG

2

CLIENT: Husky
PROSPECT: DRIFTWOOD
AREA: NPR-A ALASKA
LINE NO: 137X
PARTY NO: 1186
INST. ENG: REID
DATE: MO 4 DAY 21 YR 78

INSTRUMENT (9-TRACK): ☐ 1 SYSTEM ☐ 2 SYSTEMS ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS TYPE: ☐ DFS III ☐ DFS IV ☐ DFS IX ☐ OTHER ☐ 9 TRACK ☐ 21 TRACK FORMAT: SEG ☐ GAPPED ☐ UNGAPPED PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: NO. BYTES IN RECORD ID: NO. BYTES PER SCAN: RECORD NUMBERS: ☐ DEC ☐ OCT GAIN CONSTANT: db INPUT IMPEDANCE: ohms.

CONFIGURATION (MAG TAPE): FIELD TRACE NOS.: DATA CHANNEL NOS.: [ON MAG TAPE] AUXILIARY DATA: [1] [2] [3] [4] [5] [6] [7] AUXILIARY CHANNEL NOS.:

PARAMETER: RECORD LENGTH: sec. SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms. GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE FILTERS: FREQ. LO CUT HZ SLOPE FREQ. HI CUT HZ SLOPE NOTCH FILTER: ☐ IN ☐ OUT

DISPLAY: MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT INITIAL GAIN: db TRIP SENS: db POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

CFS I: TYPE STACK: GATE LENGTH: RECORD REJECTION: NOISE REDUCTION: NOISE THRESHOLD: CORR. SCALING: R.C.U. NORM/ALT SW.

SOURCE: TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER PATTERN: NO. OF POSITIONS: INLINE SPACING: LATERAL SPACING: STAGGER: LENGTH: WIDTH: LATERAL OFFSET: CHG/HOLE: HOLE DEPTH: SWEEP POSITION: SWEEP START: SWEEP END: SWEEP LENGTH: SWEEP TAPER: PHASE COMP:

RECEIVER: TYPE: PATTERN: NO. OF ELEMENTS: INLINE SPACING: LATERAL SPACING: CONNECTION: RESISTANCE: ohms STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

SPREAD: NO. OF GROUPS: GROUP INTERVAL: SHOTPOINT INTERVAL: FOLD: DIRECTION OF PROGRESSION: OFFSET GROUP 1: OFFSET GROUP ____: OFFSET GROUP ____: OFFSET GROUP 48/96: LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT (1-6) | TR. ___ to ___ REEL NO. (7-12) | REC. (13-16) | TR ___ to ___ REEL NO. (17-22) | REC. (23-26) | SHOT SIZE (27-29) | DEPTH (30-32) | NO. (33-34) | OFFSET (35-37) | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 518 | 6TA985 | 31 | | | 110 | 105 | | | | 43 | 529-4 | 506-1 | 532-2 | | | | | |
| 519 | | 32 | | | 110 | 105 | | | | 39 | 530-4 | 507-1 | | | | | | |
| 520 | | 33 | | | 110 | 105 | | | | 35 | 531-4 | 508-1 | | | | | | |
| 521 | | 34 | | | 110 | 105 | | | | 31 | 532-4 | 509-1 | | | | | | |
| 522 | | 35 | | | 110 | 105 | | | | 27 | 533-4 | 510-1 | | | | | | |
| 523 | | 36 | | | 110 | 105 | | | | 23 | 534-4 | 511-1 | | | | | | |
| 524 | | 37 | | | 110 | 105 | | | | 19 | 535-4 | 512-1 | | | | | | |
| 525 | | 38 | | | 110 | 105 | | | | 15 | 536-4 | 513-1 | | | | | | |
| 526 | | 39 | | | 110 | 105 | | | | 41 | 537-4 | 514-1 | 530 | TR# 26 NOISY! TR# 40 DEAD! | | | | |
| 527 | | 40 | | | 110 | 105 | | 80 | S | 37 | 538-4 | 515-1 | | TR# 44 DEAD | | | | |
| 528 | | 41 | | | 110 | 105 | | | | 33 | 539-4 | 516-1 | | TR# 28 DEAD | | | | |
| 529 | | 42 | | | 110 | 105 | | | | 29 | 540-4 | 517-1 | | TR# 26 DEAD | | | | |
| 530 | | 43 | | | 110 | 105 | | | | 43 | 541-4 | 518-1 | | TR# 31 DEAD | | | | |
| 531 | | 44 | | | 110 | 105 | | | | 39 | 542-4 | 519-1 | | | | | | |
| 532 | | 45 | | | 110 | 105 | | | | 35 | 543-4 | 520-1 | | | | | | |
| 533 | | 46 | | | 110 | 105 | | | | 31 | 544-4 | 521-1 | | | | | | |
| 534 | | 48 | | | 110 | 105 | | | | 45 | 545-4 | 522-1 | 539 | F# 47 MISSFIRE | | | | |
| | 6TA985 | TAPE CHANGE | | | | | | | | | | | | | | | | |
| | | 49 | | | | | | | | | | | | DUMMY RECORD | | | | |
| 535 | | 50 | | | 110 | 105 | | | | 41 | 546-4 | 523-1 | | TR# 3 DEAD TR 1 NOISY | | | | |

# LAND SEISMIC RECORDING LOG

3

| | | | |
|---|---|---|---|
| CLIENT: HUSKY | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 21 YR 78 |

**INSTRUMENT (9-TRACK)**: ☐ 1 SYSTEM ☐ 2 SYSTEMS ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ DFS VI ☐ OTHER ☐ 9 TRACK ☐ 21 TRACK FORMAT: SEG ☐ GAPPED ☐ UNGAPPED PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: NO. BYTES IN RECORD ID: NO. BYTES PER SCAN: RECORD NUMBERS: ☐ DEC ☐ OCT GAIN CONSTANT: db INPUT IMPEDANCE: ohms

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS: DATA CHANNEL NOS: (ON MAG TAPE) AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7) AUXILIARY CHANNEL NOS.:

**PARAMETER**: RECORD LENGTH: sec. SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms. GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ IFP ☐ FINAL ☐ OPERATE FILTERS: FREQ. LO CUT HZ SLOPE FREQ. HI CUT HZ SLOPE NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**: MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT INITIAL GAIN: db TRIP SENS: db POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG TAPE ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**: TYPE STACK: GATE LENGTH: RECORD REJECTION: NOISE REDUCTION: NOISE THRESHOLD: CORR. SCALING: F.C.U. NORM/ALT SW

**SOURCE**: TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER PATTERN: NO. OF POSITIONS: INLINE SPACING: LATERAL SPACING: STAGGER: LENGTH: WIDTH: LATERAL OFFSET: CHG/HOLE: HOLE DEPTH: SWEEP POSITION: SWEEP START: SWEEP END: SWEEP LENGTH: SWEEP TAPER: PHASE COMP:

**RECEIVER**: TYPE: PATTERN: NO. OF ELEMENTS: INLINE SPACING: LATERAL SPACING: CONNECTION: RESISTANCE: ohms STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

**SPREAD**: NO. OF GROUPS: GROUP INTERVAL: SHOTPOINT INTERVAL: FOLD: DIRECTION OF PROGRESSION: OFFSET GROUP 1: OFFSET GROUP ___: OFFSET GROUP ___: OFFSET GROUP 48/96: LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT | REEL NO. (TR. 1–12) | REC. | REEL NO. (TR. 17–26) | REC. | SIZE | DEPTH | NO. | OFFSET | DIR. | CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | CORR. STACK TR 1-48 REC. | CORR. STACK TR 49-96 HT. | CORR. STACK TR 49-96 REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 536 | 6TR9185 | 57 | | | 110 | 105 | | | | 37 | 547-4 | 524-1 | 539 | TR #46 DEAD | | | | |
| 537 | | 58 | | | 110 | 105 | | | | 33 | 548-4 | 525-1 | | | | | | |
| 538 | | 59 | | | 110 | 105 | | | | 29 | 549-4 | 526-1 | | | | | | |
| 539 | | 54 | | | 110 | 105 | | | | 25 | 550-4 | 527-1 | | | | | | |
| 540 | | 55 | | | 110 | 105 | | | | 21 | 551-4 | 528-1 | | | | | | |
| 541 | | 56 | | | 110 | 105 | | | | 17 | 552-4 | 529-1 | | | | | | |
| 542 | | 57 | | | 110 | 105 | | | | 13 | 553-4 | 530-1 | | | | | | |
| 543 | | 58 | | | 110 | 105 | | | | 45 | 554-4 | 531-1 | 548 | 1-48 SLASHED NOISY TRACES | | | | |
| 544 | | 59 | | | 110 | 105 | | | | 41 | 555-4 | 532-1 | | | | | | |
| 545 | | 60 | | | 110 | 105 | | | | 37 | 556-4 | 533-1 | | | | | | |
| 546 | | 61 | | | 110 | 105 | | | | 33 | 557-4 | 534-1 | | TR 4 NOISY | | | | |
| 547 | | 62 | | | 110 | 105 | | | | 29 | 558-4 | 535-1 | | " 8 " | | | | |
| 548 | | 63 | | | 110 | 105 | | | | 25 | 559-4 | 536-1 | 551 | " 12 " | | | | |
| 549 | | 64 | | | 110 | 105 | | | | 33 | 560-4 | 537-1 | | " 16 " | | | | |
| 550 | | 65 | | | 110 | 105 | | NO | N | 29 | 561-4 | 538-1 | | SLASHED (49-96) TR 20 NOISY TR 1+2 NOISY | | | | |
| 551 | | 66 | | | 110 | 105 | | | | 25 | 562-4 | 539-1 | | TR 4, 5 & 6 NOISY | | | | |
| 552 | | 67 | | | 110 | 105 | | | | 21 | 563-4 | 540-1 | | TR 8, 9 + 10 " | | | | |
| | | | TAPE | CHANGE | | | | | | | | | | | | | | |
| | 6TR9186 | 68 | | | | | | | | | | | | | | | | |
| 553 | | 69 | | | 110 | 105 | | 85 | S | 17 | 564-4 | 541-1 | | TR 12, 13, 14 NOISY | | | | |

# LAND SEISMIC RECORDING LOG

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A ALASKA | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 22 YR 78 |

**INSTRUMENT (9-TRACK)**: ☐ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☑ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER; ☑ 9 TRACK ☐ 21 TRACK; FORMAT: SEG B; ☐ GAPPED ☑ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: 254; RECORD NUMBERS: ☑ DEC. ☐ OCT; GAIN CONSTANT: 36 db; INPUT IMPEDANCE: ohms

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS.: 1-96; DATA CHANNEL NOS.: 1-96 (ON MAG TAPE); AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7); AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**: RECORD LENGTH: 8 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms.; GAIN MODE: ☐ INITIAL ☐ MANUAL ☑ FP ☐ FINAL ☐ OPERATE; FILTERS: FREQ. 8 LO CUT HZ SLOPE 18; FREQ. 128 HI CUT HZ SLOPE 72; NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**: MODE: ☐ FLOAT ☐ AMPLIFIER ☑ AGC ☐ DEFLOAT ☐ DIRECT; INITIAL GAIN: 42 db; TRIP SENS: 18 db; POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE; NUMBERS ON MAG TAPE: ☑ DOWNBREAK ☐ UPBREAK; ON DISPLAY

**CFS I**: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; B.C.U. NORM/ALT SW

**SOURCE**: TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: SINGLE Hole; NO. OF POSITIONS: 1; INLINE SPACING: ; LATERAL SPACING: ; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ; CHG/HOLE: 110; HOLE DEPTH: 105; SWEEP POSITION: ; SWEEP START: ; SWEEP END: ; SWEEP LENGTH: ; SWEEP TAPER: ; PHASE COMP: ;

**RECEIVER**: TYPE: G.S.C 20D; PATTERN: INLINE; NO. OF ELEMENTS: 18; INLINE SPACING: 18; LATERAL SPACING: ; CONNECTION: 2 (3x3); RESISTANCE: 240 ohms; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ;

**SPREAD**: NO. OF GROUPS: 96; GROUP INTERVAL: 220; SHOTPOINT INTERVAL: 880; FOLD: 12; DIRECTION OF PROGRESSION: NORTH; OFFSET GROUP 1: 10450; OFFSET GROUP 48: 110; OFFSET GROUP 49: 110; OFFSET GROUP 96: 10450; LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:

N 1 — 48 — 49 — 96 S; 110 110; 10450 10450

| SHOTPOINT | TR to REEL NO | REC. | TR to REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR. | CDP SWITCH | SPREAD #1 | LINE GROUPS #96 | SET UP | REMARKS: F# 70->73 TESTS | CORR. STACK NO. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 515 | GT29186 | 74 | | | 110 | 105 | | | | 49 | 565-4 | 542-1 | 560 | | 12 16 17 | |
| 515 | | 75 | | | NO | 105 | | | | 45 | 566-4 | 543-1 | | | 5 20 21 | |
| 516 | | 76 | | | NO | 105 | | | | 41 | 567-4 | 544-1 | | TR 25, 26 NOISY | 24 25 | |
| 517 | | 77 | | | NO | 105 | | 65 215 | W S | 37 | 568-4 | 545-1 | | TR#33 DEAD TR 29 30 " | 28 29 | |
| 518 | | 78 | | | NO | 105 | | | | 33 | 569-4 | 546-1 | | TR#33 DEAD | 32 33 | |
| 519 | | 79 | | | NO | 105 | | | | 29 | 570-4 | 547-1 | | | 36 37 | |
| 520 | | 80 | | | NO | 105 | | | | 25 | 571-4 | 548-1 | | | | |
| 521 | | 81 | | | NO | 105 | | 65 | W | 21 | 572-4 | 549-1 | | | | |
| 522 | | 82 | | | NO | 105 | | | | 17 | 573-4 | 550-1 | | | | |
| 523 | | 83 | | | NO | 105 | | 30 | W | 13 | 574-4 | 551-1 | | TR#4 DEAD | | |
| 524 | | 84 | | | NO | 105 | | | | 9 | 575-4 | 552-1 | | TR#8 DEAD | 57 | |
| 525 | | 85 | | | NO | 105 | | 140 | E | 5 | 576-4 | 553-1 | | TR#12 DEAD | 61 | |
| 526 | | 86 | | | NO | 105 | | 135 | W | 49 | 577-4 | 554-1 | | | 65 | |
| 527 | | 87 | | | NO | 105 | | | | 45 | 578-4 | 555-1 | | | 68 69 | 86 |
| 528 | | 88 | | | NO | 105 | | | | 41 | 579-4 | 556-1 | | | TR 73 | 90 |
| 529 | | 89 | | | NO | 105 | | | | 37 | 580-4 | 557-1 | | | 76 77 | 94 |
| | | | TAPE CHANGE | | | | | | | | | | | | | |
| | GT29187 | 90 | | | | | | | | | | | | Dummy Record | | |
| 530 | | 91 | | | 110 | 105 | | | | 33 | 581-4 | 558-1 | | | 80 81 | |
| 531 | | 92 | | | 110 | 105 | | | | 29 | 582-4 | 559-1 | | | 84 85 | |

# LAND SEISMIC RECORDING LOG

5

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 186 | INST. ENG: REID | | DATE: MO 4 DAY 22 YR 78 |

**INSTRUMENT (9-TRACK):** ☐ 1 SYSTEM ☐ 2 SYSTEMS ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ☐ 9 TRACK ☐ 21 TRACK FORMAT: SEG ☐ GAPPED ☐ UNGAPPED PACKING DENSITY: [LO] ☐ 556 BPI ☐ 800 BPI [HI] ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: NO. BYTES IN RECORD ID: NO. BYTES PER SCAN: RECORD NUMBERS: ☐ DEC. ☐ OCT GAIN CONSTANT: db INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE):** FIELD TRACE NOS.: (1) (2) (3) (4) (5) (6) (7) AUXILIARY DATA:

DATA CHANNEL NOS.: [ON MAG TAPE] AUXILIARY CHANNEL NOS.:

**PARAMETER:** RECORD LENGTH: sec. SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms. GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ IFP ☐ FINAL ☐ OPERATE FILTERS: FREQ LO CUT HZ SLOPE FREQ. HI CUT HZ SLOPE NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY:** MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT INITIAL GAIN: db TRIP SENS: db POLARITY CONVENTION: PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I:** TYPE STACK: GATE LENGTH: RECORD REJECTION: NOISE REDUCTION: NOISE THRESHOLD: CORR. SCALING: R.C.U. NORM./ALT SW.

**SOURCE:** TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER PATTERN: NO. OF POSITIONS: INLINE SPACING: LATERAL SPACING: STAGGER: LENGTH: WIDTH: LATERAL OFFSET: CHG/HOLE: HOLE DEPTH: SWEEP POSITION: SWEEP START: SWEEP END: SWEEP LENGTH: SWEEP TAPER: PHASE COMP:

**RECEIVER:** TYPE: PATTERN: NO. OF ELEMENTS: INLINE SPACING: LATERAL SPACING: CONNECTION: RESISTANCE: ohms STAGGER: LENGTH: WIDTH: LATERAL OFFSET:

**SPREAD:** NO. OF GROUPS: GROUP INTERVAL: SHOTPOINT INTERVAL: FOLD: DIRECTION OF PROGRESSION: OFFSET GROUP 1: OFFSET GROUP ____: OFFSET GROUP ____: OFFSET GROUP 48/96: LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

NOISY TRACES

| SHOTPOINT | REEL NO. (TR. ___ to ___) | REC. | REEL NO. (TR ___ to ___) | REC. | SIZE | DEPTH | NO. | OFFSET | DIR. | CDP SWITCH | LINE GROUPS | | SET UP | REMARKS | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 572 | 67A9807 | 93 | | | 110 | 105 | | | | 25 | 583-4 | 560-1 | | | | 88 89 | | |
| 573 | | 94 | | | 110 | 105 | | | | 21 | 584-4 | 561-1 | | | | 92 93 | | |
| 574 | | 95 | | | 110 | 105 | | | | 17 | 585-4 | 562-1 | | | | 96 | | |
| 575 | | 96 | | | 110 | 105 | | | | 13 | 586-4 | 563-1 | | | | | | |
| 576 | | 97 | | | 110 | 105 | | | | 9 | 587-4 | 564-1 | | | | 88 | | |
| 577 | | 98 | | | 110 | 105 | | | | 5 | 588-4 | 565-1 | | SLASHED | | 92 | | |
| 578 | | 99 | | | 110 | 105 | | | | 1 | 589-4 | 566-1 | | | | 1 - 96 | | |
| 579 | | 100 | | | 110 | 105 | | | | 45 | 590-4 | 567-1 | 584 | | | 81 93 | | |
| 580 | | 101 | | | 110 | 105 | | | | 41 | 591-4 | 568-1 | | TR 1 NOISY | | 1 - 85 | | |
| 581 | | 102 | | | 110 | 105 | | | | 37 | 592-4 | 569-1 | | " 5 " | | 5 - 89 | | |
| 582 | | 103 | | | 110 | 105 | | | | 33 | 593-4 | 570-1 | | " 9 " | | 9 - 93 | | |
| 583 | | 104 | | | 110 | 105 | | | | 29 | 594-4 | 571-1 | | " 13 " | | 13 - 95 | | |
| 584 | | 105 | | | 110 | 105 | | 25 | S | 25 | 595-4 | 572-1 | | " 17 " | | 17 | | |
| 585 | | 106 | | | 110 | 105 | | | | 21 | 596-4 | 573-1 | | " 21 " | | [illegible] | | |
| 586 | | 107 | | | 110 | 105 | | | | 17 | 597-4 | 574-1 | | " 25 " | | | | |
| 587 | | 108 | | | 110 | 105 | | | | 13 | 598-4 | 575-1 | | " 29 " | | | | |
| | TAPE | | CHANGE | | | | | | | | | | | | | | | |
| | 67A9808 | 109 | | | | | | | | | | | | Dummy Record | | | | |
| 588 | | 110 | | | 110 | 105 | | | | 9 | 599-4 | 576-1 | | TR 33 " | | | | |
| 589 | | 111 | | | 110 | 105 | | | | 5 | 600-4 | 577-1 | | TR 37 " | | | | |

# LAND SEISMIC RECORDING LOG

6

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: Reid | | DATE: MO 4 DAY 22 YR 78 |

**INSTRUMENT [9-TRACK]**: ☐ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER; ☐ 9 TRACK ☐ 21 TRACK; FORMAT: SEG; ☐ GAPPED ☐ UNGAPPED; PACKING DENSITY: (LO) ☐ 556 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: ; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: ; RECORD NUMBERS: ☐ DEC. ☐ OCT; GAIN CONSTANT: db; INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS.: ; DATA CHANNEL NOS.: (ON MAG TAPE); AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7); AUXILIARY CHANNEL NOS.:

**PARAMETER**: RECORD LENGTH: sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms.; GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE; FILTERS: FREQ. LO CUT HZ SLOPE; FREQ. HI CUT HZ SLOPE; NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**: MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT; INITIAL GAIN: db; TRIP SENS.: db; POLARITY CONVENTION: ; PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE; NUMBERS ON MAG TAPE; ☐ DOWNBREAK ☐ UPBREAK; ON DISPLAY

**CFS I**: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; # C.U. NORM./ALT SW.

**SOURCE**: TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: ; NO. OF POSITIONS: ; INLINE SPACING: ; LATERAL SPACING: ; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ; CHG/HOLE: ; HOLE DEPTH: ; SWEEP POSITION: ; SWEEP START: ; SWEEP END: ; SWEEP LENGTH: ; SWEEP TAPER: ; PHASE COMP.:

**RECEIVER**: TYPE: ; PATTERN: ; NO. OF ELEMENTS: ; INLINE SPACING: ; LATERAL SPACING: ; CONNECTION: ; RESISTANCE: ohms; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET:

**SPREAD**: NO. OF GROUPS: ; GROUP INTERVAL: ; SHOTPOINT INTERVAL: ; FOLD: ; DIRECTION OF PROGRESSION: ; OFFSET GROUP 1: ; OFFSET GROUP ____: ; OFFSET GROUP ____: ; OFFSET GROUP 48/96: ; LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

NOISY TRACES

| SHOTPOINT (1-16) | TR. ___ to ___ REEL NO. (7-12) | REC. (13-16) | TR ___ to ___ REEL NO. (17-22) | REC. (23-26) | SHOT SIZE (27-29) | DEPTH (30-32) | NO. (33-35) | OFFSET (36-37) | DIR. | CDP SWITCH | SPREAD LINE GROUPS | | SET UP | REMARKS | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 590 | 472088 | 112 | | | NO | 105 | | | | 1 | 601-4 | 578-1 | | SLASHED | | | | |
| 591 | | 114 | | | NO | 105 | | | | 45 | 602-4 | 579-1 | 596 | F#113 MISSFIRE | | | | |
| 592 | | 115 | | | NO | 105 | 60 | | N | 41 | 603-4 | 580-1 | | | | | | |
| 593 | | 116 | | | NO | 105 | | | | 37 | 604-4 | 581-1 | | | | | | |
| 594 | | 117 | | | NO | 105 | | | | 33 | 605-4 | 582-1 | | | | | | |
| 595 | | 118 | | | NO | 105 | | | | 29 | 606-4 | 583-1 | | | | | | |
| 596 | | 119 | | | NO | 105 | | | | 25 | 607-4 | 584-1 | | | | | | |
| 597 | | 120 | | | NO | 105 | | | | 21 | 608-4 | 585-1 | | | | | | |
| 598 | | 121 | | | NO | 105 | | | | 17 | 609-4 | 586-1 | | TR 3 NOISY | | 3 | 57 | 58 |
| 599 | | 122 | | | NO | 105 | | | | 13 | 610-4 | 587-1 | | TR 7 " | → | 7 | | |
| 600 | | 123 | | | NO | 105 | 90 | | N | 9 | 611-4 | 588-1 | | TR 11 " | | 11 | | |
| 601 | | 124 | | | NO | 105 | 30 | | W | 5 | 612-4 | 589-1 | | TR 15 " | | 15 | | |
| 602 | | 125 | | | NO | 105 | | | | 37 | 613-4 | 590-1 | 608 | WRONG CDP POSTION TR 31 NOISY | | | | |
| 603 | | 126 | | | NO | 105 | | | | 45 | 614-4 | 591-1 | | | | | | |
| 604 | | 127 | | | NO | 105 | | | | 41 | 615-4 | 592-1 | | | | | | |
| 605 | | 128 | | | NO | 105 | | | | 37 | 616-4 | 593-1 | | | | | | |
| | | | TAPE | | CHANGE | | | | | | | | | | | | | |

# LAND SEISMIC RECORDING LOG

7

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 23 YR 78 |

**INSTRUMENT (9-TRACK)**: ☑ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☑ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER; ☑ 9 TRACK ☐ 21 TRACK; FORMAT: SEG B; ☐ GAPPED ☑ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: 254; RECORD NUMBERS: ☑ DEC ☐ OCT.; GAIN CONSTANT: 36 db; INPUT IMPEDANCE: ohms

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS.: 1-96; DATA CHANNEL NOS.: 1-96 (ON MAG TAPE); AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7); AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**: RECORD LENGTH: 8 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms.; GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE; FILTERS: FREQ. 8 LO CUT HZ SLOPE 18; FREQ. 128 HI CUT HZ SLOPE 72; NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**: MODE: ☑ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT; INITIAL GAIN: 36 db; TRIP SENS: 18 db; POLARITY CONVENTION: ; PRESSURE INCREASE ON GEOPHONE: ☑ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE; ☑ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; R.C.U. NORM./ALT SW.

**SOURCE**: TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: SINGLE Hole; CHG/HOLE: 110; HOLE DEPTH: 105; NO. OF POSITIONS: ; SWEEP POSITION: ; INLINE SPACING: ; SWEEP START: ; LATERAL SPACING: ; SWEEP END: ; STAGGER: ; SWEEP LENGTH: ; LENGTH: ; SWEEP TAPER: ; WIDTH: ; PHASE COMP.: ; LATERAL OFFSET:

**RECEIVER**: TYPE: GSC 200; CONNECTION: 2(3x3); PATTERN: INLINE; RESISTANCE: 240 ohms; NO. OF ELEMENTS: 18; INLINE SPACING: 18; STAGGER: ; LATERAL SPACING: ; LENGTH: ; WIDTH: ; LATERAL OFFSET:

**SPREAD**: NO. OF GROUPS: 96; GROUP INTERVAL: 220; SHOTPOINT INTERVAL: 880; FOLD: 12; DIRECTION OF PROGRESSION: NORTH; OFFSET GROUP 1: 10450; OFFSET GROUP 48: 110; OFFSET GROUP 49: 110; OFFSET GROUP 96: 10450; LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:




| SHOTPOINT | RPT | TR. ___ to ___ REEL NO. | REC. | TR ___ to ___ REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: F# 1297 138 TESTS | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 696 | | 672989 | V39 | | | NO | 105 | | | | 45 | 617-4 | 594-1 | 511 | TR# 52 DEAD TR 1 DEAD, 1-24 SLASHED | | | | |
| 697 | | | V40 | | | NO | 105 | | | | 41 | 618-4 | 595-1 | | | | | | |
| 698 | | | V41 | | | NO | 105 | | | | 37 | 619-4 | 596-1 | | | | | | |
| 699 | | | V42 | | | NO | 105 | | | | 33 | 620-4 | 597-1 | | | | | | |
| 700 | | | V43 | | | NO | 105 | | | | 29 | 621-4 | 598-1 | | | | | | |
| 701 | | | V44 | | | NO | 105 | | | | 25 | 622-4 | 599-1 | | | | | | |
| 702 | | | V45 | | | NO | 105 | | | | 21 | 623-4 | 600-1 | | | | | | |
| 703 | | | V46 | | | NO | 105 | | | | 17 | 624-4 | 601-1 | | | | | | |
| 704 | | | V47 | | | NO | 105 | | | | 13 | 625-4 | 602-1 | | | | | | |
| 705 | | | V48 | | | NO | 105 | | | | 9 | 626-4 | 603-1 | | | | | | |
| 706 | | | V49 | | | NO | 105 | | | | 5 | 627-4 | 604-1 | | | | | | |
| 707 | | | V50 | | | NO | 105 | | | | 1 | 628-4 | 605-1 | | | | | | |
| 708 | | | V51 | | | NO | 105 | | | | 45 | 629-4 | 606-1 | 513 | TR # 90 NOISY | | | | |
| 709 | | | V52 | | | NO | 105 | | | | 41 | 630-4 | 607-1 | | 94 NOISY | | | | |
| 710 | | | V53 | | | NO | 105 | | | | 37 | 631-4 | 608-1 | | | | | | |
| 711 | | | V54 | | | NO | 105 | | | | 33 | 632-4 | 609-1 | | | | | | |
| 712 | | | V55 | | | NO | 105 | | | | 29 | 633-4 | 610-1 | | SLASHED 49-96 | | | | |
| | | | | TRACE | | CHANGE | | | | | | | | | | | | | |
| | | 672990 | V56 | | | NO | | | | | | | | | DUMMY RECORD | | | | |
| 713 | | | V57 | | | NO | 105 | | | | 25 | 634-4 | 611-1 | | TR # 78 DEAD | | | | |

# LAND SEISMIC RECORDING LOG

8

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST-ENG: Reid | | DATE: MO 4 DAY 23 YR 78 |

**INSTRUMENT (9-TRACK)**
☐ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ____ | ☐ 9 TRACK ☐ 21 TRACK | FORMAT: SEG ____ ☐ GAPPED ☐ UNGAPPED | PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI
NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: ☐ DEC ☐ OCT | GAIN CONSTANT: ____ db | INPUT IMPEDANCE: ____ ohms.

**CONFIGURATION (MAG TAPE)**
FIELD TRACE NOS.: ____ (1) (2) (3) (4) (5) (6) (7)
DATA CHANNEL NOS.: ____ (ON MAG TAPE) | AUXILIARY DATA: ____
AUXILIARY CHANNEL NOS.: ____

**PARAMETER**
RECORD LENGTH: ____ sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ____ ms. | GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ IFP ☐ FINAL ☐ OPERATE | FILTERS: FREQ. ____ LO CUT HZ SLOPE ____ FREQ. ____ HI CUT HZ SLOPE ____ | NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**
MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT | INITIAL GAIN: ____ db | TRIP SENS: ____ db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG. TAPE | ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**
TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW.

**SOURCE**
TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ | PATTERN: | NO. OF POSITIONS: | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:
CHG/HOLE: | HOLE DEPTH: | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP:

**RECEIVER**
TYPE: | PATTERN: | NO. OF ELEMENTS: | INLINE SPACING: | LATERAL SPACING:
CONNECTION: | RESISTANCE: ____ ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**
NO. OF GROUPS: | GROUP INTERVAL: | SHOTPOINT INTERVAL: | FOLD: | DIRECTION OF PROGRESSION:
OFFSET GROUP 1: | OFFSET GROUP ____: | OFFSET GROUP ____: | OFFSET GROUP 48/96: | LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:
WAIT ON DRILLS
RAN MONTHLY TESTS

SNOW MELTING - JUGS FALLING FROM PLANTS & NOISY

| SHOTPOINT (1-5) | RPT. (6) | TR. ____ to ____ REEL NO. (7-12) | REC. (13-16) | TR ____ to ____ REEL NO. (17-22) | REC. (23-26) | SHOT SIZE (27-29) | DEPTH (30-32) | NO. | OFFSET (35-37) | DIR | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 624 | | 672990 | 158 | | | NO | 105 | | | | 21 | 635-4 | 612-1 | 623 | | NOISY TR. | | | |
| 625 | | | 159 | | | NO | 105 | | | | 17 | 636-4 | 613-1 | | | | | | |
| 626 | | | 160 | | | NO | 105 | | | | 13 | 637-4 | 614-1 | | | 78-79 | | | |
| 627 | | | 161 | | | NO | 105 | | | | 33 | 638-4 | 615-1 | | | 72->75 | 82-83 | | |
| 628 | | | 162 | | | NO | 105 | | | | 29 | 639-4 | 616-1 | | | 76->79 | 86-87 | | |
| 629 | | | 163 | | | NO | 105 | | | | 25 | 640-4 | 617-1 | | | 95 | | | |
| 630 | | | 164 | | | NO | 105 | | | | 21 | 641-4 | 618-1 | | | | | | |
| 631 | | | 165 | | | NO | 105 | | 30 | S | 17 | 642-4 | 619-1 | | | 73 | | | |
| 632 | | | 166 | | | NO | 105 | | 30 | S | 13 | 643-4 | 620-1 | | | 77 | | | |

# LAND SEISMIC RECORDING LOG

9

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A ALASKA | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: BEIP | | DATE: MO 4 DAY 24 YR 78 |

**INSTRUMENT (9-TRACK)**

☑ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☑ 1-48 & 49-96 | ☐ ODDS ☐ EVENS | TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER | ☑ 9 TRACK ☐ 21 TRACK | FORMAT: SEG D | ☐ GAPPED ☑ UNGAPPED | PACKING DENSITY: (LO) ☐ 556 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128 | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: 254 | RECORD NUMBERS: ☑ DEC. ☐ OCT | GAIN CONSTANT: 36 db | INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**

FIELD TRACE NOS.: 1-96 (1) (2) (3) (4) (5) (6) (7)

DATA CHANNEL NOS.: 1-96 (ON MAG TAPE) | AUXILIARY DATA: | AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**

RECORD LENGTH: 8 sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms. | GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ FP ☐ FINAL ☐ OPERATE | FILTERS: FREQ. 8 LO CUT HZ SLOPE 18 | FREQ. 128 HI CUT HZ SLOPE 72 | NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**

MODE: ☑ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT | INITIAL GAIN: 42 db | ZRIP SENS: 18 db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE | ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**

TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW.

**SOURCE**

TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER | PATTERN: Single Hole | NO. OF POSITIONS: 1 | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

CHG/HOLE: 110 | HOLE DEPTH: 105 | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP:

**RECEIVER**

TYPE: G.S.C. 10D | PATTERN: INLINE | NO. OF ELEMENTS: 18 | INLINE SPACING: 18 | LATERAL SPACING:

CONNECTION: Z (3x3) | RESISTANCE: 240 ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**

NO. OF GROUPS: 96 | GROUP INTERVAL: 220 | SHOTPOINT INTERVAL: 880 | FOLD: 12 | DIRECTION OF PROGRESSION: NORTH

OFFSET GROUP 1: 10450 | OFFSET GROUP 48: 110 | OFFSET GROUP 49: 110 | OFFSET GROUP 48/96: 10450 | LEADING GROUP: 1

**DIAGRAMS/MISC. INFORMATION:**




| SHOTPOINT | TR. to REEL NO. | REC. | TR to REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR | SPREAD CDP SWITCH | LINE GROUPS 96 | | SET UP | REMARKS: F# 167-170 TESTS | CORR. STACK TR 1-48 HY. | REC. | TR 49-96 HY. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 633 | GT2990 | VT1 | | | NO | 105 | ✓ | | | 45 | 644-4 | 621-1 | 638 | | NOISY | | TR. | |
| 634 | | VT2 | | | NO | 105 | ✓ | | | 41 | 645-4 | 622-1 | | | ✓ | | | |
| 635 | | VT3 | | | NO | 105 | ✓ | | | 37 | 646-4 | 623-1 | | | | | | |
| 636 | | VT4 | | | NO | 105 | ✓ | 110 | S | 33 | 647-4 | 624-1 | | | | | | |
| 637 | | VT5 | | | NO | 105 | ✓ | 80 | S | 29 | 648-4 | 625-1 | | | | | | |
| 638 | | VT6 | | | NO | ~~105~~ 100 | ✓ | | | 25 | 649-4 | 626-1 | | | | | | |
| 639 | | VT7 | | | NO | 105 | ✓ | | | 21 | 650-4 | 627-1 | | TAPE CHANGE | | | | |
| 640 | GT2991 | VT8 | | | NO | 105 | ✓ | | | 17 | 651-4 | 628-1 | | F# 178 DUMMY RECORD | | | | |
| 641 | | VT80 | | | NO | 105 | ✓ | | | 13 | 652-4 | 629-1 | | | | | | |
| 642 | | VT81 | | | NO | ~~105~~ 95 | ✓ | | | 9 | 653-4 | 630-1 | | TR# 4 NOISY | | | | |
| 643 | | VT82 | | | NO | 105 | ✓ | | | 5 | 654-4 | 631-1 | | TR# 8 NOISY | | | | |
| 644 | | VT83 | | | NO | 105 | ✓ | | | 49 | 655-4 | 632-1 | 650 | TR# 7 NOISY STN# 654-2 NOISY - COULD NOT GUIDE | | | | |
| 645 | | VT84 | | | NO | 105 | ✓ | | | 45 | 656-4 | 633-1 | | | 11 | | | |
| 646 | | VT85 | | | NO | 105 | ✓ | | | 41 | 657-4 | 634-1 | | TR1-48 SLASHED | 15 | | | |
| 647 | | VT86 | | | 120 | 105 | ✓ | 130 | N | 37 | 658-4 | 635-1 | | | 19 | | | |
| 648 | | VT87 | | | NO | 105 | ✓ | | | 33 | 659-4 | 636-1 | | | 23 | | | |
| 649 | | VT88 | | | NO | 105 | ✓ | 135 | S | 29 | 660-4 | 637-1 | | | 27 | | | |
| 650 | | VT89 | | | ~~110~~ 120 | 105 | ✓ | 75 135 | N S | 49 | 661-4 | 638-1 | 656 | | 31 | | | |
| 651 | | VT90 | | | NO | 90 | | 50 | S | 45 | 662-4 | 639-1 | | | 35 | | | |
| 652 | | VT91 | | | 110 | 90 | | 20 | S | 41 | 663-4 | 640-1 | | | | | | |

# LAND SEISMIC RECORDING LOG

10

CLIENT: HUSKY
PROSPECT: DRIFTWOOD
AREA: NPR-A
LINE NO: 137X
PARTY NO: 1186
INST. ENG: REID
DATE: MO 4 DAY 24 YR 78

**INSTRUMENT (9-TRACK)**
☐ 1 SYSTEM ☐ 2 SYSTEMS
☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS
TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER
☐ 9 TRACK ☐ 21 TRACK
FORMAT: SEG ☐ GAPPED ☐ UNGAPPED
PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI
NO. BYTES IN HEADER REC:
NO. BYTES IN RECORD ID:
NO. BYTES PER SCAN:
RECORD NUMBERS: ☐ DEC ☐ OCT
GAIN CONSTANT: db
INPUT IMPEDANCE: ohms

**CONFIGURATION (MAG TAPE)**
FIELD TRACE NOS.:
DATA CHANNEL NOS.: (ON MAG TAPE)
AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)
AUXILIARY CHANNEL NOS.:

**PARAMETER DISPLAY CFS I**
RECORD LENGTH: sec.
SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms
GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE
FILTERS: FREQ. LO CUT HZ SLOPE FREQ. HI CUT HZ SLOPE
NOTCH FILTER: ☐ IN ☐ OUT
MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT
INITIAL GAIN: db
TRIP SENS: db
POLARITY CONVENTION:
PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY
TYPE STACK:
GATE LENGTH:
RECORD REJECTION:
NOISE REDUCTION:
NOISE THRESHOLD:
CORR. SCALING:
R.C.U. NORM./ALT SW.

**SOURCE**
TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER
PATTERN:
NO. OF POSITIONS:
INLINE SPACING:
LATERAL SPACING:
STAGGER:
LENGTH:
WIDTH:
LATERAL OFFSET:
CHG/HOLE:
HOLE DEPTH:
SWEEP POSITION:
SWEEP START:
SWEEP END:
SWEEP LENGTH:
SWEEP TAPER:
PHASE COMP:

**RECEIVER**
TYPE:
PATTERN:
NO. OF ELEMENTS:
INLINE SPACING:
LATERAL SPACING:
CONNECTION:
RESISTANCE: ohms
STAGGER:
LENGTH:
WIDTH:
LATERAL OFFSET:

**SPREAD**
NO. OF GROUPS:
GROUP INTERVAL:
SHOTPOINT INTERVAL:
FOLD:
DIRECTION OF PROGRESSION:
OFFSET GROUP 1:
OFFSET GROUP ____:
OFFSET GROUP ____:
OFFSET GROUP 48/96:
LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT (1-16) | TR ___ to ___ REEL NO. (17-22) | REC. (23-26) | TR ___ to ___ REEL NO. (27-29) | REC. (30-32) | SHOT SIZE (33-35) | DEPTH (36-38) | NO. (39-41) | OFFSET (42-44) | DIR. (45) | SPREAD CDP SWITCH (46-48) | LINE GROUPS (49-52) | (53-56) | SET UP (57-60) | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6513 | 4N99V | 192 | | | NO | 195 | | 40 | N | 37 | 664-4 | 641-1 | 656 | TR #6 DEAD | NOISY | TR. | | |
| 654 | | 193 | | | NO | 195 | | | | 33 | 665-4 | 642-1 | | TR #8 DEAD | | | | |
| 655 | | 194 | | | NO | 90 | | | | 29 | 666-4 | 643-1 | | TR #9 NOISY | 89 | | | |
| 656 | | 195 | | | NO | 90 | | | | 25 | 667-4 | 644-1 | | 93 NOISY | 93 | | | |
| 657 | | 196 | | | NO | 90 | | | | 21 | 668-4 | 645-1 | | | 2016 | 59 | 92 | |
| | | | TAPE | CHANGE | | | | | | 17 | 669-4 | 646-1 | | | | | | |
| | 4N98R | 197 | | | | | | | | | | | | DUMMY RECORD | | | | |
| 658 | | 198 | | | NO | 105 | | | | 17 | 669-4 | 646-1 | | TR #88 DEAD | 201 | 63 | 96 | |

# LAND SEISMIC RECORDING LOG

11

| | | | |
|---|---|---|---|
| CLIENT: HUSKY | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 25 YR 78 |

**INSTRUMENT (9-TRACK)**
☐ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☑ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER | ☑ 9 TRACK ☐ 21 TRACK | FORMAT: SEG B | ☐ GAPPED ☑ UNGAPPED | PACKING DENSITY: (LO) ☐ 556 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128 | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: 254 | RECORD NUMBERS: ☑ DEC ☐ OCT | GAIN CONSTANT: 36 db | INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**
FIELD TRACE NOS.: 1-96 | AUXILIARY DATA: | (1) (2) (3) (4) (5) (6) (7)
DATA CHANNEL NOS.: 1-96 (ON MAG TAPE) | AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**
RECORD LENGTH: 8 sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms. | GAIN MODE: ☐ INITIAL ☐ MANUAL ☑ IFP ☐ FINAL ☐ OPERATE | FILTERS: FREQ. 8 LO CUT HZ SLOPE 18 | FREQ. 128 HI CUT HZ SLOPE 72 | NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**
MODE: ☐ FLOAT ☐ AMPLIFIER ☑ AGC ☐ DEFLOAT ☐ DIRECT | INITIAL GAIN: 42 db | TRIP SENS: 18 db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☑ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE | ☑ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**
TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM./ALT SW.

**SOURCE**
TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER | PATTERN: SINGLE HOLE | NO. OF POSITIONS: | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:
CHG/HOLE: 110 | HOLE DEPTH: 105 | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP:

**RECEIVER**
TYPE: G.S.C. 20D | PATTERN: INLINE | NO. OF ELEMENTS: 18 | INLINE SPACING: 18 | LATERAL SPACING:
CONNECTION: 2 (3,3) | RESISTANCE: 240 ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**
NO. OF GROUPS: 96 | GROUP INTERVAL: 220 | SHOTPOINT INTERVAL: 880 | FOLD: 12 | DIRECTION OF PROGRESSION: NORTH
OFFSET GROUP 1: 10450 | OFFSET GROUP 48: 110 | OFFSET GROUP 49: 110 | OFFSET GROUP 48/96: 10450 | LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:




| SHOTPOINT (1-6) | TR. ___ to ___ REEL NO. (7-12) | REC. (13-16) | TR. ___ to ___ REEL NO. (17-22) | REC. (23-26) | SHOT SIZE (27-29) | DEPTH (30-32) | NO. | OFFSET (35-37) | DIR | SPREAD CDP SWITCH | LINE GROUPS | SET UP | REMARKS: F# 199-208 TESTS | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 659 | 6TA998 | 209 | | | 110 | 105 | | | | 49 | 6T0-4 | 665 | | | | | |
| 660 | | 210 | | | 110 | 105 | | | | 45 | 6T1-4 | 678-1 | | | | | |
| 661 | | 211 | | | 110 | 100 | | | | 41 | 6T2-4 | 649-1 | | | | | |
| 662 | | 212 | | | 110 | 105 | | | | 37 | 6T3-4 | 650-1 | F# 212 MISSFIRE | | | | |
| 663 | | 214 | | | 110 | 110 | | | | 32 | 6T4-4 | 651-2 | WRONG CDP POSITION | | | | |
| 664 | | 215 | | | 110 | 105 | | 90 | S | 29 | 6T5-4 | 652-1 | 1-48 SLASHED | | | | |
| 665 | | 216 | | | 110 | 105 | | | | 25 | 6T6-4 | 653-1 | | | | | |
| 666 | | 217 | | | 110 | 110 | | | | 21 | 6T7-4 | 654-1 | | | | | |
| 667 | | 218 | | | 110 | 110 | | 100 | S | 17 | 6T8-4 | 655-1 | | | | | |
| 668 | | 219 | | | 110 | 117 | | | | 13 | 6T9-4 | 656-1 | TR#2 DEAD | | | | |
| 669 | | 220 | | | 110 | 110 | | 110 | N | 27 | 680-4 | 657-1 | 669-2 TR#6 " | | | | |
| 670 | | 221 | | | 110 | 115 | | 100 | N | 23 | 681-4 | 658-1 | | | | | |
| 671 | | 222 | | | 110 | 105 | | 150 | E | 19 | 682-4 | 659-1 | TR#1 DEAD | | | | |
| 672 | | 224 | | | 110 | 105 | | 140 / 130 | N / N | 45 | 683-4 | 660-1 | 677 F# 223 MISSFIRE N. WELL HOLE | | | | |
| 673 | | 225 | | | 110 | 105 | | | | 41 | 684-4 | 661-1 | SLASHED | | | | |
| | | | TAPE | | CHANGE | | | | | | | | | | | | |
| | 6TA993 | 226 | | | | | | | | | | | DUMMY RECORD | | | | |
| 674 | | 227 | | | 110 | 105 | | | | 37 | 685-4 | 662-1 | | | | | |
| 675 | | 228 | | | 110 | 105 | | 130 | N | 33 | 686-4 | 663-1 | | | | | |
| 676 | | 229 | | | 110 | 105 | | | | 29 | 687-4 | 664-1 | NO RECORD - DEAD CAP | | | | |

# LAND SEISMIC RECORDING LOG

12

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST ENG: REID | | DATE: MO 4 DAY 25 YR 78 |

**INSTRUMENT (9-TRACK)**
☐ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ____ | ☐ 9 TRACK ☐ 21 TRACK | FORMAT: SEG ____ ☐ GAPPED ☐ UNGAPPED | PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI
NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: ☐ DEC. ☐ OCT | GAIN CONSTANT: ____ db | INPUT IMPEDANCE: ____ ohms.

**CONFIGURATION (MAG TAPE)**
FIELD TRACE NOS.: ____
DATA CHANNEL NOS.: ____ (ON MAG TAPE)
AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)
AUXILIARY CHANNEL NOS.: ____

**PARAMETER**
RECORD LENGTH: ____ sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ____ ms. | GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE | FILTERS: FREQ. ____ LO CUT HZ SLOPE ____ FREQ ____ HI CUT HZ SLOPE ____ | NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**
MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT | INITIAL GAIN: ____ db | TRIP SENS: ____ db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG TAPE | ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**
TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW.

**SOURCE**
TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ | PATTERN: | CHG/HOLE: | HOLE DEPTH: | NO. OF POSITIONS: | SWEEP POSITION: | INLINE SPACING: | SWEEP START: | LATERAL SPACING: | SWEEP END: | STAGGER: | SWEEP LENGTH: | LENGTH: | SWEEP TAPER: | WIDTH: | PHASE COMP: | LATERAL OFFSET:

**RECEIVER**
TYPE: | PATTERN: | NO. OF ELEMENTS: | INLINE SPACING: | LATERAL SPACING:
CONNECTION: | RESISTANCE: ____ ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**
NO. OF GROUPS: | GROUP INTERVAL: | SHOTPOINT INTERVAL: | FOLD: | DIRECTION OF PROGRESSION:
OFFSET GROUP 1: | OFFSET GROUP ____: | OFFSET GROUP ____: | OFFSET GROUP 48/96: | LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT | TR. ____ to ____ REEL NO. | REC. | TR ____ to ____ REEL NO | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 677 | GT2993 | 229 | | | NO | 105 | | | | 25 | 688-4 | 665-1 | 677 | | | | | |
| 678 | | 230 | | | NO | 105 | | | | 39 | 689-4 | 666-1 | 681-2 | | | | | |
| 679 | | 231 | | | NO | 105 | | | | 35 | 690-4 | 667-1 | | TR#23 NOISY | | | | |
| 680 | | 232 | | | NO | 105 | | | | 31 | 691-4 | 668-1 | | 27 NOISY | | | | |
| 681 | | 233 | | | NO | 105 | | | | 27 | 692-4 | 669-1 | | 96 & 31 NOISY | | | | |
| 682 | | 234 | | | NO | 105 | | | | 23 | 693-4 | 670-1 | | 35 & 36 & 39 NOISY TR#1 DEAP | | | | |

# LAND SEISMIC RECORDING LOG

13

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: Reid | | DATE: MO 4 DAY 26 YR 78 |

**INSTRUMENT (9-TRACK)**

☑ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☑ DFS V ☐ OTHER ____ | ☑ 9 TRACK ☐ 21 TRACK | FORMAT: SEG B | ☐ GAPPED ☑ UNGAPPED | PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128 | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: 254 | RECORD NUMBERS: ☑ DEC. ☐ OCT | GAIN CONSTANT: 36 db | INPUT IMPEDANCE: ____ ohms.

**CONFIGURATION (MAG TAPE)**

FIELD TRACE NOS.: 1-96 (1) (2) (3) (4) (5) (6) (7)

DATA CHANNEL NOS.: 1-96 (ON MAG TAPE)

AUXILIARY DATA:

AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**

RECORD LENGTH: 8 sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ____ ms. | GAIN MODE: ☑ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE | FILTERS: FREQ 8 LO CUT HZ SLOPE 18 FREQ. 128 HI CUT HZ SLOPE 72 | NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**

MODE: ☑ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT | INITIAL GAIN: 42 db | TRIP SENS: 18 db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☑ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE ☑ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**

TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | P.C.U. NORM./ALT SW.

**SOURCE**

TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ | PATTERN: Single Hole | NO. OF POSITIONS: 1 | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

CHG/HOLE: 110 | HOLE DEPTH: 105 | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP.:

**RECEIVER**

TYPE: G.S.C 20D | PATTERN: INLINE | NO. OF ELEMENTS: 18 | INLINE SPACING: 18 | LATERAL SPACING:

CONNECTION: 2 (3x3) | RESISTANCE: 240 ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**

NO. OF GROUPS: 96 | GROUP INTERVAL: 220 | SHOTPOINT INTERVAL: 880 | FOLD: 12 | DIRECTION OF PROGRESSION: NORTH

OFFSET GROUP I: 10450 | OFFSET GROUP II: 110 | OFFSET GROUP III: 110 | OFFSET GROUP 48/96: 10450 | LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:

WAIT ON DRILLS

ONLY ONE LINE TRUCK

| SHOTPOINT | REF. | TR. ____ to ____ REEL NO. | REC. | TR ____ to ____ REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR. | SPREAD COP SWITCH | LINE GROUPS | | SET UP | REMARKS: WINDY | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 5 6 | | 7 12 13 16 | | 17 22 23 26 | | 27 29 | 30 32 | | 35 37 | | | | | | | | | | |
| 1683 | | 6TV999 | 235 | | | NO | 105 | | | | 49 | 684-4 | 671-1 | 689 | MONTHLY TESTS - PATTERSON | | | | |
| 1684 | | | 236 | | | NO | 105 | | | | 45 | 685-4 | 672-1 | | | | | | |
| 1685 | | | 237 | | | NO | 105 | | | | 41 | 686-4 | 673-1 | | | | | | |
| 1686 | | | 238 | | | NO | 105 | | | | 37 | 687-4 | 674-1 | | | | | | |
| 1687 | | | 239 | | | NO | 105 | | | | 45 | 688-4 | 675-1 | 692 | | | | | |
| 1688 | | | 240 | | | NO | 105 | | 30 | N | 41 | 689-4 | 676-1 | | TR 3 NOISY | | | | |
| 1689 | | | 241 | | | NO | 105 | | 110 39 | N W | 37 | 700-4 | 677-1 | | | | | | |
| 1690 | | | 242 | | | NO | 105 | | NO | N | 33 | 701-4 | 678-1 | | | | | | |
| 1691 | | | 243 | | | NO | 105 | | NO | N | 29 | 702-4 | 679-1 | | TR 4 NOISY | | | | |
| 1692 | | | 244 | | | NO | 105 | | | | 25 | 703-4 | 680-1 | | | | | | |
| | | TAPE CHANGE | | | | | | | | | | | | | | | | | |
| | | 6TV994 | 245 | | | | | | | | | | | | DUMMY RECORD | | | | |
| 1693 | | | 246 | | | NO | 105 | | 160 | S | 21 | 704-4 | 681-1 | | 1-48 SLAGGED TR 72 BAD | | | | |

# LAND SEISMIC RECORDING LOG

14

| | |
|---|---|
| CLIENT: | HUSKY |
| PROSPECT: | DRIFTWOOD |
| AREA: | NPR-A |
| LINE NO: | 137X |
| PARTY NO: | 1186 |
| INST. ENG: | REID |
| DATE: | MO 4 DAY 27 YR 78 |

**INSTRUMENT (9-TRACK)**: ☑ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER; ☑ 9 TRACK ☐ 21 TRACK; FORMAT: SEG B; ☐ GAPPED ☑ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☑ 1600 BPI

NO. BYTES IN HEADER REC: 128; NO. BYTES IN RECORD ID:; NO. BYTES PER SCAN: 254; RECORD NUMBERS: ☑ DEC ☐ OCT; GAIN CONSTANT: 36 db; INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS: 1-96; DATA CHANNEL NOS.: 1-96 (ON MAG TAPE); AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7); AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**: RECORD LENGTH: 8 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☑ 2 ms. ☐ ms.; GAIN MODE: ☐ INITIAL ☐ MANUAL ☑ FIP ☐ FINAL ☐ OPERATE; FILTERS: FREQ. 8; LO CUT HZ SLOPE 18; HI CUT FREQ. 125 HZ SLOPE 72; NOTCH FILTER: ☐ IN ☑ OUT

**DISPLAY**: MODE: ☑ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT; INITIAL GAIN: 42 db; TRIP SENS: 36 db; POLARITY CONVENTION:; PRESSURE INCREASE ON GEOPHONE: ☑ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE; ☑ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**: TYPE STACK:; GATE LENGTH:; RECORD REJECTION:; NOISE REDUCTION:; NOISE THRESHOLD:; CORR. SCALING:; R.C.U. NORM./ALT SW

**SOURCE**: TYPE: ☑ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: SINGLE HOLE; NO. OF POSITIONS 1; INLINE SPACING:; LATERAL SPACING:; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:; CHG/HOLE: 110; HOLE DEPTH: 105; SWEEP POSITION:; SWEEP START:; SWEEP END:; SWEEP LENGTH:; SWEEP TAPER:; PHASE COMP:

**RECEIVER**: TYPE: G.S.C 200; PATTERN: TWINS; NO. OF ELEMENTS: 18; INLINE SPACING: 18; LATERAL SPACING:; CONNECTION: 2(3-3); RESISTANCE: 240 ohms; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:

**SPREAD**: NO OF GROUPS: 96; GROUP INTERVAL: 220; SHOTPOINT INTERVAL: 880; FOLD: 12; DIRECTION OF PROGRESSION: NORTH; OFFSET GROUP 1: 10450; OFFSET GROUP 48: 110; OFFSET GROUP 49: 110; OFFSET GROUP 48/96: 10450; LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:

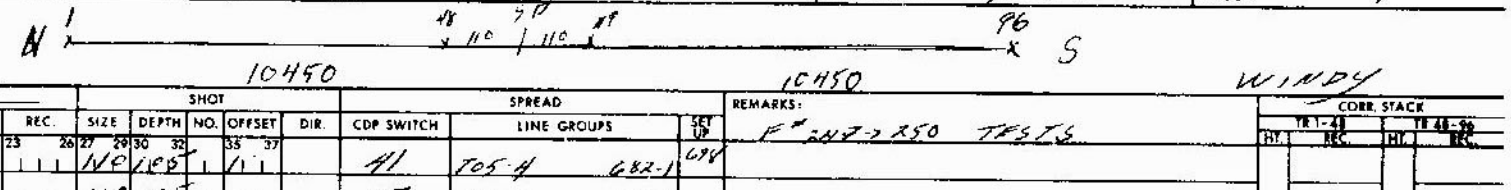


| SHOTPOINT | TR | REEL NO. | REC. | SIZE | DEPTH | NO. | OFFSET | DIR. | CDP SWITCH | LINE GROUPS | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 694 | | 672894 | 251 | NO | 105 | | 11 | | 41 | 705-4 682-1 | 698 | | | | | |
| 695 | | | 252 | NO | 105 | | | | 37 | 706-4 683-1 | | | | | | |
| 696 | | | 253 | NO | 105 | | | | 33 | 707-4 684-1 | | | | | | |
| 697 | | | 254 | NO | 105 | | 150 / 160 | N / W | 29 | 708-4 685-1 | | | | | | |
| 698 | | | 255 | NO | 105 | | | | 25 | 709-4 686-1 | | | | | | |
| 699 | | | 256 | NO | 105 | | | | 21 | 710-4 687-1 | | | | | | |
| 700 | | | 257 | NO | 180 | | 130 / 140 | E / N | 17 | 711-4 688-1 | | | | | | |
| 701 | | | 258 | NO | 105 | | 75 / 110 | W / N | 13 | 712-4 689-1 | | | | | | |
| 702 | | | 259 | NO | 105 | | 180 / 200 | E / N | 9 | 713-4 690-1 | | 72-96 SLASHED | | | | |
| 703 | | | 260 | NO | 105 | | | | 5 | 714-4 691-1 | | | | | | |
| 704 | | | 261 | NO | 180 | | 2150 | S | 1 | 715-4 692-1 | | | | | | |
| 705 | | | 262 | NO | 105 | | | | 45 | 716-4 693-1 | 710 | | | | | |
| 706 | | | 263 | NO | 105 | | | | 41 | 717-4 694-1 | | TR# 1-32 SLASHED | | | | |
| 707 | | | 264 | NO | 105 | | | | 37 | 718-4 695-1 | | | | | | |
| 708 | | | 265 | NO | 105 | | 100 | N | 33 | 719-4 696-1 | | | | | | |
| 709 | | | 266 | NO | 105 | | | | 29 | 720-4 697-1 | | | | | | |
| | | | TAPE CHANGE | | | | | | | | | | | | | |
| | | 672895 | 267 | | | | | | | | | DUMMY RECORD | | | | |
| 710 | | | 268 | NO | 105 | | | | 25 | 721-4 698-1 | | | | | | |
| 711 | | | 269 | NO | 105 | | | | 21 | 722-4 699-1 | | | | | | |

# LAND SEISMIC RECORDING LOG

15

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: Driftwood | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: Reid | | DATE: MO 4 DAY 27 YR 18 |

**INSTRUMENT (9-TRACK)**

☐ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ____ | ☐ 9 TRACK ☐ 21 TRACK | FORMAT: SEG ____ | ☐ GAPPED ☐ UNGAPPED | PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: ☐ DEC. ☐ OCT | GAIN CONSTANT: ____ db | INPUT IMPEDANCE: ____ ohms.

**CONFIGURATION (MAG TAPE)**

FIELD TRACE NOS: | AUXILIARY DATA: | (1) (2) (3) (4) (5) (6) (7)

DATA CHANNEL NOS.: ____ (ON MAG TAPE) | AUXILIARY CHANNEL NOS.: ____

**PARAMETER**

RECORD LENGTH: ____ sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms ☐ 2 ms. ☐ ____ ms. | GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ IFP ☐ FINAL ☐ OPERATE | FILTERS: FREQ ____ LO CUT HZ SLOPE ____ | FREQ. ____ HI CUT HZ SLOPE ____ | NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**

MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT | INITIAL GAIN: ____ db | TRIP SENS: ____ db | POLARITY CONVENTION | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG TAPE | ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**

TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM./ALT SW.

**SOURCE**

TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ | PATTERN: | NO. OF POSITIONS: | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

CHG/HOLE: | HOLE DEPTH: | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP:

**RECEIVER**

TYPE: | PATTERN: | NO. OF ELEMENTS: | INLINE SPACING: | LATERAL SPACING:

CONNECTION: | RESISTANCE: ____ ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**

NO. OF GROUPS: | GROUP INTERVAL: | SHOTPOINT INTERVAL: | FOLD: | DIRECTION OF PROGRESSION:

OFFSET GROUP 1: | OFFSET GROUP ____ | OFFSET GROUP ____ | OFFSET GROUP 48/96: | LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT (1–36) | BPI | TR. ____ to ____ REEL NO. (9–12) | REC. (13–16) | TR ____ to ____ REEL NO. (17–22) | REC. (23–26) | SHOT SIZE (27–29) | DEPTH (30–32) | NO. | OFFSET (35–37) | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| TV2 | | 672895 | 270 | | | NO | 105 | | 40 | N | 17 | 723-4 | 700-1 | 710 | | | | | |
| TV3 | | | 271 | | | NO | 105 | | | | 15 | 724-4 | 701-1 | | | | | | |
| TV4 | | | 272 | | | NO | 105 | | | | 9 | 725-4 | 702-1 | | | | | | |
| TV5 | | | 273 | | | NO | 105 | | 250 | N | 5 | 726-4 | 703-1 | | TR#1 NOISY | | | | |
| TV6 | | | 274 | | | NO | 105 | | | | 1 | 727-4 | 704-1 | | TR#405 PARAMALFED | | | | |
| TV7 | | | 275 | | | NO | 105 | | | | 27 | 728-4 | 705-1 | 712-2 | TR#1 DEAD | | | | |
| TV8 | | | 276 | | | NO | 105 | | | | 47 | 729-4 | 706-1 | 713-2 | | | | | |
| TV9 | | | 277 | | | NO | 105 | | | | 43 | 730-4 | 707-1 | | | | | | |
| TV10 | | | 278 | | | NO | 105 | | | | 39 | 731-4 | 708-1 | | TR#60 DEAD | | | | |
| TV11 | | | 279 | | | NO | 105 | | | | 35 | 732-4 | 709-1 | | | | | | |
| TV12 | | | 280 | | | NO | 105 | | 125 | N | 31 | 733-4 | 710-1 | | | | | | |
| TV13 | | | 281 | | | NO | 105 | | 135 | S | 27 | 734-4 | 711-1 | | | | | | |
| TV14 | | | 282 | | | NO | 105 | | | | 23 | 735-4 | 712-1 | | | | | | |
| TV15 | | | 283 | | | NO | 105 | | | | 19 | 736-4 | 713-1 | | | | | | |
| TV16 | | | 284 | | | NO | 105 | | | | 15 | 737-4 | 714-1 | | | | | | |
| TV17 | | | 285 | | | NO | 105 | | 200 | S | 11 | 738-4 | 715-1 | | | | | | |
| TV18 | | | 286 | | | NO | 105 | | 410 | E | 7 | 739-4 | 716-1 | | | | | | |
| | | | | TAPE | CHANGE | | | | | | | | | | | | | | |
| | | 672896 | 287 | | | | NO | | | | 7 | | | | DUMMY RECORD | | | | |
| TV19 | | | 288 | | | NO | NO | | | | 3 | 740-4 | 717-1 | | | | | | |

# LAND SEISMIC RECORDING LOG

16

| | | | |
|---|---|---|---|
| CLIENT: Husky | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 28 YR 78 |

**INSTRUMENT (9-TRACK)**: ☒ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96; ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☐ ~~DFS V~~ ☐ OTHER; ☒ 9 TRACK ☐ 21 TRACK; FORMAT: SEG B; ☐ GAPPED ☒ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☒ 1600 BPI

NO. BYTES IN HEADER REC: 128; NO. BYTES IN RECORD ID:; NO. BYTES PER SCAN: 254; RECORD NUMBERS: ☒ DEC ☐ OCT; GAIN CONSTANT: 36 db; INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS.: 1-96; DATA CHANNEL NOS.: 1-96 (ON MAG TAPE); AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7); AUXILIARY CHANNEL NOS.: SP5 SP7 SP8

**PARAMETER**: RECORD LENGTH: 8 sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☒ 2 ms. ☐ ms.; GAIN MODE: ☒ ~~AGC~~ ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE; FILTERS: FREQ. 8 LO CUT HZ SLOPE 18; FREQ. 128 HI CUT HZ SLOPE 72; NOTCH FILTER: ☐ IN ☒ OUT

**DISPLAY**: MODE: ☒ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT; INITIAL GAIN: 42 db; TRIP SENS: 18 db; POLARITY CONVENTION:; PRESSURE INCREASE ON GEOPHONE: ☒ NEGATIVE ☐ POSITIVE; NUMBERS ON MAG TAPE: ☒ DOWNBREAK ☐ UPBREAK; ON DISPLAY

**CFS I**: TYPE STACK:; GATE LENGTH:; RECORD REJECTION:; NOISE REDUCTION:; NOISE THRESHOLD:; CORR. SCALING:; R.C.U. NORM/ALT SW

**SOURCE**: TYPE: ☒ DYNAMITE ☐ VIBROSEIS ☐ OTHER; PATTERN: Single Hole; NO. OF POSITIONS: 1; INLINE SPACING:; LATERAL SPACING:; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:; CHG/HOLE: 110; HOLE DEPTH: 105; SWEEP POSITION:; SWEEP START:; SWEEP END:; SWEEP LENGTH:; SWEEP TAPER:; PHASE COMP:

**RECEIVER**: TYPE: G.S.C 20D; PATTERN: INLINE; NO. OF ELEMENTS: 18; INLINE SPACING: 18; LATERAL SPACING:; CONNECTION: 2(3x3); RESISTANCE: 240 ohms; STAGGER:; LENGTH:; WIDTH:; LATERAL OFFSET:

**SPREAD**: NO. OF GROUPS: 96; GROUP INTERVAL: 220; SHOTPOINT INTERVAL: 880; FOLD: 12; DIRECTION OF PROGRESSION: NORTH; OFFSET GROUP 1: 10450; OFFSET GROUP 48: 110; OFFSET GROUP 48: 110; OFFSET GROUP 49/96: 10450; LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:

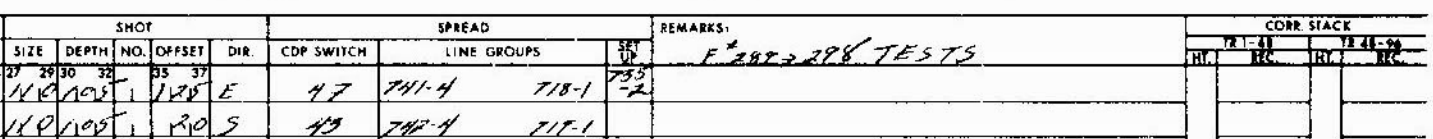


| SHOTPOINT (1–5/6) | RPT. | TR ___ to ___ REEL NO (7–12) | REC. (13–16) | TR ___ to ___ REEL NO. (17–22) | REC. (23–26) | SHOT SIZE (27–29) | DEPTH (30–32) | NO. | OFFSET (35–37) | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: F#288-298 TESTS | CORR STACK TR 1-48 HT. | REC. | TR 49-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 730 | | 672896 | 299 | | | 110 | 105 | | 105 | E | 47 | 741-4 | 718-1 | 733-2 | | | | | |
| 731 | | | 300 | | | 110 | 105 | | 210 | S | 43 | 742-4 | 719-1 | | | | | | |
| 732 | | | 301 | | | 110 | 105 | | 105 | N | 39 | 743-4 | 720-1 | | TR 77 NOISY | | | | |
| 733 | | | 302 | | | 110 | 105 | | | | 35 | 744-4 | 721-1 | | | | | | |
| 734 | | | 303 | | | 110 | 105 | | | | 31 | 745-4 | 722-1 | | | | | | |
| 735 | | | 304 | | | 110 | 105 | | | | 27 | 746-4 | 723-1 | | TR#96 DEAD | | | | |
| 736 | | | 305 | | | 110 | 105 | | | | 23 | 747-4 | 724-1 | | | | | | |
| 737 | | | 306 | | | 110 | 105 | | | | 19 | 748-4 | 725-1 | | | | | | |
| 738 | | | 307 | | | 110 | 105 | | | | 15 | 749-4 | 726-1 | | TR#3 DEAD 1-2 PARALLELED | | | | |
| 739 | | | 308 | | | 110 | 105 | | 88 | N | 47 | 750-4 | 727-1 | 744-2 | TR 10 + TR 86 NOISY | | | | |
| 740 | | | 309 | | | 110 | 105 | | 30 | N | 43 | 751-4 | 728-1 | | | | | | |
| 741 | | | 310 | | | 110 | 105 | | 110 | N | 39 | 752-4 | 729-1 | | | | | | |
| 742 | | | 311 | | | 110 | 105 | | 80 110 | S W | 35 | 753-4 | 730-1 | | SLASHED 49-96 | | | | |
| 743 | | | 312 | | | 110 | ~~115~~ 90 | | | | 31 | 754-4 | 731-1 | | | | | | |
| 744 | | | 313 | | | 120 | 105 | | | | 27 | 755-4 | 732-1 | | | | | | |
| 745 | | | 314 | | | 120 | 105 | | | | 23 | 756-4 | 733-1 | | | | | | |
| | | | TAPE CHANGE | | | | | | | | | | | | | | | | |
| | | 672897 | 315 | | | | | | | | | | | | DUMMY RECORD | | | | |
| 746 | | | 316 | | | 120 | 105 | | | | 19 | 757-4 | 734-1 | | TR#1 NOISY | | | | |
| 747 | | | 317 | | | 120 | 105 | | | | 15 | 758-4 | 735-1 | | TR#39 DEAD & NOISY | | | | |

# LAND SEISMIC RECORDING LOG

17

| | | | |
|---|---|---|---|
| CLIENT: HUSKY | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 28 YR 78 |

**INSTRUMENT (9-TRACK)**

☐ 1 SYSTEM ☐ 2 SYSTEMS | ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 | ☐ ODDS & EVENS | TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ____ | ☐ 9 TRACK ☐ 21 TRACK | FORMAT: SEG ____ ☐ GAPPED ☐ UNGAPPED | PACKING DENSITY: (LO) ☐ 556 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: | NO. BYTES IN RECORD ID: | NO. BYTES PER SCAN: | RECORD NUMBERS: ☐ DEC. ☐ OCT | GAIN CONSTANT: ____ db | INPUT IMPEDANCE: ____ ohms.

**CONFIGURATION (MAG TAPE)**

FIELD TRACE NOS.: | AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)

DATA CHANNEL NOS.: ____ (ON MAG TAPE) | AUXILIARY CHANNEL NOS.:

**PARAMETER**

RECORD LENGTH: ____ sec. | SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ____ ms. | GAIN MODE: ☐ INITIAL ☐ MANUAL ☐ IFP ☐ FINAL ☐ OPERATE | FILTERS: FREQ ____ LO CUT HZ SLOPE ____ FREQ ____ HI CUT HZ SLOPE ____ | NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**

MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT | INITIAL GAIN: ____ db | TRIP SENS: ____ db | POLARITY CONVENTION: | PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON MAG. TAPE | ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**

TYPE STACK: | GATE LENGTH: | RECORD REJECTION: | NOISE REDUCTION: | NOISE THRESHOLD: | CORR. SCALING: | R.C.U. NORM/ALT SW

**SOURCE**

TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____ | PATTERN: | NO. OF POSITIONS: | INLINE SPACING: | LATERAL SPACING: | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

CHG/HOLE: | HOLE DEPTH: | SWEEP POSITION: | SWEEP START: | SWEEP END: | SWEEP LENGTH: | SWEEP TAPER: | PHASE COMP:

**RECEIVER**

TYPE: | PATTERN: | NO. OF ELEMENTS: | INLINE SPACING: | LATERAL SPACING:

CONNECTION: | RESISTANCE: ____ ohms | STAGGER: | LENGTH: | WIDTH: | LATERAL OFFSET:

**SPREAD**

NO. OF GROUPS: | GROUP INTERVAL: | SHOTPOINT INTERVAL: | FOLD: | DIRECTION OF PROGRESSION:

OFFSET GROUP 1: | OFFSET GROUP ____: | OFFSET GROUP ____: | OFFSET GROUP 48/96: | LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT (1–56) | TR ____ to ____ REEL NO (7–12) | REC. (13–16) | TR ____ to ____ REEL NO. (17–22) | REC. (23–26) | SHOT SIZE (27–29) | DEPTH (30–32) | NO. (33–35) | OFFSET (36–37) | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 748 | GT-999T | 318 | | | 120 | 105 | | | | 11 | 759-4 | 736-1 | 748-2 | TR# 13 DEAD | | | | |
| 749 | | 319 | | | 120 | 105 | | | | 7 | 760-4 | 737-1 | | ~~TR~~ DEAD 12 NOISY | | | | |
| 750 | | 320 | | | 120 | 105 | | | | 3 | 761-4 | 738-1 | | 200 SY ~~DEAD~~ NOISY | | | | |
| 751 | | 321 | | | 120 | 105 | | | | 47 | 762-4 | 739-1 | | | | | | |
| 752 | | 322 | | | 120 | 105 | | 50 | W | 43 | 763-4 | 740-1 | | | | | | |
| 753 | | 323 | | | 120 | 105 | | | | 39 | 764-4 | 741-1 | | | | | | |
| 754 | | 324 | | | 120 | 105 | | | | 35 | 765-4 | 742-1 | | | | | | |
| 755 | | 325 | | | 120 | 105 | | 40 | N | 31 | 766-4 | 743-1 | | | | | | |
| 756 | | 326 | | | 120 | 105 | | 50 / 120 | W / N | 39 | 767-4 | 744-1 | 759-2 | | | | | |
| 757 | | 327 | | | 120 | 105 | | | | 35 | 768-4 | 745-1 | | | | | | |
| 758 | | 328 | | | 120 | 105 | | NO | N | 31 | 769-4 | 746-1 | | | | | | |
| 759 | | 329 | | | 120 | 105 | | | | 27 | 770-4 | 747-1 | | | | | | |
| 760 | | 330 | | | 120 | 90 ~~105~~ | | | | 23 | 771-4 | 748-1 | | | | | | |
| 761 | | 331 | | | 120 | 105 | | | | 19 | 772-4 | 749-1 | | | | | | |
| 762 | | 332 | | | 120 | 105 | | | | 15 | 773-4 | 750-1 | | | | | | |
| 763 | | 333 | | | 120 | 105 | | | | 11 | 774-4 | 751-1 | | TR# 1 DEAD | | | | |
| | | | TAPE | CHANGE | | | | | | | | | | | | | | |
| | GT-999T | 334 | | | | | | | | | | | | | | | | |
| 764 | | | | | NO | 105 | | | | ~~49~~ | ~~775-4~~ | ~~754-1~~ | 770 | | | | | |
| 765 | | | | | NO | 105 | | | | ~~45~~ | ~~776-4~~ | ~~755-1~~ | | | | | | |

# LAND SEISMIC RECORDING LOG

18

| | |
|---|---|
| CLIENT: | HUSKY |
| PROSPECT: | DRIFTWOOD |
| AREA: | NPR-A |
| LINE NO: | 137X |
| PARTY NO: | 1186 |
| INST. ENG: | REID |
| DATE: | MO 4 DAY 29 YR 78 |

**INSTRUMENT (9-TRACK)**: [x] 1 SYSTEM [ ] 2 SYSTEMS; [ ] 1-24 & 25-48 [x] 1-48 & 49-96; [ ] ODDS & EVENS; TYPE: [ ] DFS III [ ] DFS IV [x] DFS V [ ] OTHER; [x] 9 TRACK [ ] 21 TRACK; FORMAT: SEG B; [ ] GAPPED [x] UNGAPPED; PACKING DENSITY: (LO) [ ] 356 BPI [ ] 800 BPI (HI) [ ] 712 BPI [x] 1600 BPI

**CONFIGURATION (MAG TAPE)**: NO. BYTES IN HEADER REC: 128; NO. BYTES IN RECORD ID: ; NO. BYTES PER SCAN: 254; RECORD NUMBERS: [x] DEC. [ ] OCT; GAIN CONSTANT: 36 db; INPUT IMPEDANCE: ohms.

FIELD TRACE NOS.: 1-96

DATA CHANNEL NOS.: 1-96 (ON MAG TAPE)

AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)

AUXILIARY CHANNEL NOS.: SPS SPS STB

**PARAMETER**: RECORD LENGTH: 8 sec.; SAMPLE RATE: [ ] 1 ms. [ ] 4 ms. [x] 2 ms. [ ] ___ ms; GAIN MODE: [x] TFP [ ] INITIAL [ ] FINAL [ ] MANUAL [ ] OPERATE; FILTERS: FREQ. 8 LO CUT HZ SLOPE 18; FREQ. 128 HI CUT HZ SLOPE 72; NOTCH FILTER: [ ] IN [x] OUT

**DISPLAY**: MODE: [x] AGC [ ] FLOAT [ ] DEFLOAT [ ] AMPLIFIER [ ] DIRECT; INITIAL GAIN: 42 db; TRIP SENS: 18 db; POLARITY CONVENTION: ; PRESSURE INCREASE ON GEOPHONE: [ ] NEGATIVE [ ] POSITIVE; NUMBERS ON MAG TAPE [x] DOWNBREAK [ ] UPBREAK ON DISPLAY

**CFS I**: TYPE STACK: ; GATE LENGTH: ; RECORD REJECTION: ; NOISE REDUCTION: ; NOISE THRESHOLD: ; CORR. SCALING: ; R.C.U. NORM/ALT SW.

**SOURCE**: TYPE: [x] DYNAMITE [ ] VIBROSEIS [ ] OTHER; PATTERN: SINGLE HOLE; NO. OF POSITIONS: 1; INLINE SPACING: ; LATERAL SPACING: ; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET: ; CHG/HOLE: 110; HOLE DEPTH: 105; SWEEP POSITION: ; SWEEP START: ; SWEEP END: ; SWEEP LENGTH: ; SWEEP TAPER: ; PHASE COMP.:

**RECEIVER**: TYPE: G.S.C 20D; PATTERN: INLINE; NO. OF ELEMENTS: 18; INLINE SPACING: 18; LATERAL SPACING: ; CONNECTION: 2(3x3); RESISTANCE: 240 ohms; STAGGER: ; LENGTH: ; WIDTH: ; LATERAL OFFSET:

**SPREAD**: NO. OF GROUPS: 96; GROUP INTERVAL: 220; SHOTPOINT INTERVAL: 880; FOLD: 12; DIRECTION OF PROGRESSION: NORTH; OFFSET GROUP 1: 10450; OFFSET GROUP 48: 110; OFFSET GROUP 49: 110; OFFSET GROUP 48/96: 10450; LEADING GROUP: 1

DIAGRAMS/MISC. INFORMATION:




| SHOTPOINT | RPT. | TR. ___ to ___ REEL NO. | REC. | TR ___ to ___ REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 766 | | 6789 | 338 | | | 120 | 105 | | | | 19 | 775-4 | 752-1 | 770 | F*334 -> 337 TESTS | | | | |
| 765 | | | 339 | | | 120 | 105 | | 220 | S | 45 | 776-4 | 753-1 | | | | | | |
| 764 | | | 340 | | | 120 | 105 | | | | 41 | 777-4 | 754-1 | | | | | | |
| 763 | | | 341 | | | 120 | 105 | | | | 37 | 778-4 | 755-1 | | | | | | |
| 762 | | | 342 | | | 120 | 105 | | | | 33 | 779-4 | 756-1 | | TR 86 NOISY | | | | |
| 761 | | | 343 | | | 120 | 105 | | 30 | S | 29 | 780-4 | 757-1 | | TR 85, 89, 90 NOISY | | | | |
| 760 | | | 344 | | | 120 | 105 | | | | 25 | 781-4 | 758-1 | | TR 89 93, 94 " | | | | |
| 759 | | | 345 | | | 120 | 105 | | | | 33 | 782-4 | 759-1 | 773 | TR 96 NOISY | | | | |
| 758 | | | 346 | | | 120 | 105 | | | | 29 | 783-4 | 760-1 | | | | | | |
| 757 | | | 347 | | | 120 | 105 | | | | 25 | 784-4 | 761-1 | | | | | | |
| 756 | | | 348 | | | 120 | 105 | | | | 21 | 785-4 | 762-1 | | | | | | |
| 755 | | | 349 | | | 120 | 105 | | 40 | N | 17 | 786-4 | 763-1 | | SLASHED ✓ | | | | |
| 754 | | | 350 | | | 120 | 105 | | | | 49 | 787-4 | 764-1 | 780 | | | | | |
| 753 | | | 351 | | | 120 | 105 | | | | 45 | 788-4 | 765-1 | | | | | | |
| 752 | | | 352 | | | 120 | 105 | | | | 41 | 789-4 | 766-1 | | | | | | |
| 751 | | | 353 | | | 120 | 105 | | 100 | N | 37 | 790-4 | 767-1 | | | | | | |
| 750 | | | 354 | | | 120 | 105 | | | | 33 | 791-4 | 768-1 | | SLASHED 49-96 ✓ | | | | |
| 749 | | | 355 | | | 120 | 105 | | | | 29 | 792-4 | 769-1 | | | | | | |
| | | | | TAPE | CHANGE | | | | | | | | | | | | | | |

# LAND SEISMIC RECORDING LOG

19

| | | | |
|---|---|---|---|
| CLIENT: HUSKY | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 29 YR 78 |

**INSTRUMENT (9-TRACK)**: ☐ 1 SYSTEM ☐ 2 SYSTEMS; ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS; TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER ____; ☐ 9 TRACK ☐ 21 TRACK; FORMAT: SEG ____; ☐ GAPPED ☐ UNGAPPED; PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI

NO. BYTES IN HEADER REC: ____; NO. BYTES IN RECORD ID: ____; NO. BYTES PER SCAN: ____; RECORD NUMBERS: ☐ DEC. ☐ OCT; GAIN CONSTANT: (1) ____ (2) ____ (3) ____ db; INPUT IMPEDANCE: (4) ____ (5) ____ (6) ____ (7) ____ ohms.

**CONFIGURATION (MAG TAPE)**: FIELD TRACE NOS.: ____; DATA CHANNEL NOS.: ____ (ON MAG TAPE); AUXILIARY DATA: ____; AUXILIARY CHANNEL NOS.: ____

**PARAMETER**: RECORD LENGTH: ____ sec.; SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ____ ms.; GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE; FILTERS: FREQ. ____ LO CUT HZ SLOPE ____; FREQ. ____ HI CUT HZ SLOPE ____; NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**: MODE: ☐ FLOAT ☐ AMPLIFIER ☐ AGC ☐ DEFLOAT ☐ DIRECT; INITIAL GAIN: ____ db; TRIP SENS: ____ db; POLARITY CONVENTION: ____; PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE; NUMBERS ON MAG TAPE: ☐ DOWNBREAK ☐ UPBREAK; ON DISPLAY

**CFS I**: TYPE STACK: ____; GATE LENGTH: ____; RECORD REJECTION: ____; NOISE REDUCTION: ____; NOISE THRESHOLD: ____; CORR. SCALING: ____; R.C.U. NORM/ALT SW.

**SOURCE**: TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER ____; PATTERN: ____; CHG/HOLE: ____; HOLE DEPTH: ____; NO. OF POSITIONS: ____; INLINE SPACING: ____; LATERAL SPACING: ____; SWEEP POSITION: ____; SWEEP START: ____; SWEEP END: ____; STAGGER: ____; LENGTH: ____; WIDTH: ____; LATERAL OFFSET: ____; SWEEP LENGTH: ____; SWEEP TAPER: ____; PHASE COMP: ____

**RECEIVER**: TYPE: ____; PATTERN: ____; NO. OF ELEMENTS: ____; INLINE SPACING: ____; LATERAL SPACING: ____; CONNECTION: ____; RESISTANCE: ____ ohms; STAGGER: ____; LENGTH: ____; WIDTH: ____; LATERAL OFFSET: ____

**SPREAD**: NO. OF GROUPS: ____; GROUP INTERVAL: ____; SHOTPOINT INTERVAL: ____; FOLD: ____; DIRECTION OF PROGRESSION: ____; OFFSET GROUP 1: ____; OFFSET GROUP ____: ____; OFFSET GROUP ____: ____; OFFSET GROUP 48/96: ____; LEADING GROUP: ____

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT (1–36) | REC. | TR. ____ to ____ REEL NO. (7–12) | REC. (13–16) | TR ____ to ____ REEL NO. (17–22) | REC. (23–26) | SHOT SIZE (27–29) | DEPTH (30–32) | NO. | OFFSET (33–37) | DIR. | SPREAD CDP SWITCH | LINE GROUPS | | SET UP | REMARKS: | CORR. STACK TR 1-48 HI. | REC. | TR 49-96 HI. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 782 | | WR999 | 357 | | | 120 | 105 | | | | 25 | T73-4 | T70-1 | 782 | F# 356 DUMMY | | | | |
| 783 | | | 358 | | | 120 | 105 | | | | 21 | T74-4 | T71-1 | | TR 68 NOISY TR 59 NOISY | | | | |
| 784 | | | 359 | | | 120 | 105 | | | | 17 | T75-4 | T72-1 | | TR 63 " | | | | |
| 785 | | | 360 | | | 120 | 105 | | | | 13 | T76-4 | T73-1 | | 1-48 SLASHED | | | | |
| 786 | | | 361 | | | 120 | 105 | | | | 9 | T77-4 | T74-1 | | | | | | |
| 787 | | | 362 | | | 120 | 100 | | | | 5 | T78-4 | T75-1 | | | | | | |
| 788 | | | 363 | | | 120 | 105 | | | | 13 | T79-4 | T76-1 | 792 -2 | | | | | |
| 789 | | | 364 | | | 120 | 105 | | | | 39 | 800-4 | T77-1 | | | | | | |
| 790 | | | 365 | | | 120 | 105 | | 45 | N | 35 | 801-4 | T78-1 | | | | | | |
| 791 | | | 366 | | | 120 | 105 | | | | 31 | 802-4 | T79-1 | | TR 84 NOISY | | | | |
| 792 | | | 367 | | | 120 | 105 | | | | 27 | 803-4 | T80-1 | | | | | | |
| 793 | | | 368 | | | 120 | 105 | | | | 23 | 804-4 | T81-1 | | | | | | |
| 794 | | | 369 | | | 120 | 105 | | 100 | N | 19 | 805-4 | T82-1 | | TR# 95 + 96 NOISY - CAT | | | | |
| 795 | | | 370 | | | 120 | 105 | | | | 15 | 806-4 | T83-1 | | TR 95 + 96 " | | | | |
| 796 | | | 371 | | | 120 | 105 | | | | 11 | 807-4 | T84-1 | | | | | | |
| 797 | | | 372 | | | 120 | ~~105~~ 75 | | 50 | S | 49 | 808-4 | T85-1 | 903 | | | | | |
| 798 | | | 373 | | | 120 | 105 | | | | 45 | ~~T5~~ 5-4 | T86-1 | | | | | | |
| 799 | | | 374 | | | 120 | 105 | | | | 41 | T3 8 | T87-1 | | | | | | |
| | | | | TAPE | CHANGE | | | | | | | | | | | | | | |

# LAND SEISMIC RECORDING LOG

20

| | | | |
|---|---|---|---|
| CLIENT: HUSKY | PROSPECT: DRIFTWOOD | AREA: NPR-A | LINE NO: 137X |
| PARTY NO: 1186 | INST. ENG: REID | | DATE: MO 4 DAY 29 YR 78 |

**INSTRUMENT (9-TRACK)**
☐ 1 SYSTEM ☐ 2 SYSTEMS ☐ 1-24 & 25-48 ☐ 1-48 & 49-96 ☐ ODDS & EVENS
TYPE: ☐ DFS III ☐ DFS IV ☐ DFS V ☐ OTHER
☐ 9 TRACK ☐ 21 TRACK
FORMAT: SEG ☐ GAPPED ☐ UNGAPPED
PACKING DENSITY: (LO) ☐ 356 BPI ☐ 800 BPI (HI) ☐ 712 BPI ☐ 1600 BPI
NO. BYTES IN HEADER REC: NO. BYTES IN RECORD ID: NO. BYTES PER SCAN:
RECORD NUMBERS: ☐ DEC. ☐ OCT
GAIN CONSTANT: db
INPUT IMPEDANCE: ohms.

**CONFIGURATION (MAG TAPE)**
FIELD TRACE NOS.:
DATA CHANNEL NOS.: (ON MAG TAPE)
AUXILIARY DATA: (1) (2) (3) (4) (5) (6) (7)
AUXILIARY CHANNEL NOS.:

**PARAMETER**
RECORD LENGTH: sec.
SAMPLE RATE: ☐ 1 ms. ☐ 4 ms. ☐ 2 ms. ☐ ms.
GAIN MODE: ☐ IFP ☐ INITIAL ☐ FINAL ☐ MANUAL ☐ OPERATE
FILTERS: FREQ. LO CUT HZ SLOPE FREQ. HI CUT HZ SLOPE
NOTCH FILTER: ☐ IN ☐ OUT

**DISPLAY**
MODE: ☐ AGC ☐ FLOAT ☐ DEFLOAT ☐ AMPLIFIER ☐ DIRECT
INITIAL GAIN: db
TRIP SENS: db
POLARITY CONVENTION:
PRESSURE INCREASE ON GEOPHONE: ☐ NEGATIVE ☐ POSITIVE } NUMBERS ON ON MAG. TAPE ☐ DOWNBREAK ☐ UPBREAK } ON DISPLAY

**CFS I**
TYPE STACK:
GATE LENGTH:
RECORD REJECTION:
NOISE REDUCTION:
NOISE THRESHOLD:
CORR. SCALING:
R.C.U. NORM/ALT SW.

**SOURCE**
TYPE: ☐ DYNAMITE ☐ VIBROSEIS ☐ OTHER
PATTERN:
CHG/HOLE: HOLE DEPTH:
NO. OF POSITIONS: SWEEP POSITION:
INLINE SPACING: SWEEP START:
LATERAL SPACING: SWEEP END:
STAGGER: SWEEP LENGTH:
LENGTH: SWEEP TAPER:
WIDTH: PHASE COMP:
LATERAL OFFSET:

**RECEIVER**
TYPE:
CONNECTION:
PATTERN:
RESISTANCE: ohms
NO. OF ELEMENTS:
STAGGER:
INLINE SPACING:
LENGTH:
LATERAL SPACING:
WIDTH:
LATERAL OFFSET:

**SPREAD**
NO. OF GROUPS:
OFFSET GROUP 1:
GROUP INTERVAL:
OFFSET GROUP ___:
SHOTPOINT INTERVAL:
OFFSET GROUP ___:
FOLD:
OFFSET GROUP 48/96:
DIRECTION OF PROGRESSION:
LEADING GROUP:

DIAGRAMS/MISC. INFORMATION:

| SHOTPOINT | RPT. | TR. ___ to ___ REEL NO. | REC. | TR ___ to ___ REEL NO. | REC. | SHOT SIZE | DEPTH | NO. | OFFSET | DIR. | SPREAD CDP SWITCH | LINE GROUPS | SET UP | REMARKS: | CORR. STACK TR 1-48 HT. | REC. | TR 48-96 HT. | REC. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 800 | | 673000 | 376 | | | 120 | 105 | | | | 37 | TS-12 T88-1 | | TR#1 DEAD ✓ F#375 DUMMY | | | | |
| 801 | | | 377 | | | 120 | 105 | | | | 33 | TS 16 T89-1 | | | | | | |
| 802 | | | 378 | | | 120 | 105 | | | | 29 | TS 20 T90-1 | | | | | | |
| 803 | | | 379 | | | 120 | 105 | | | | 25 | TS 24 T91-1 | | TR 1 NOISY | | | | |
| 804 | | | 380 | | | 120 | 105 | | | | 21 | TS 28 T92-1 | | | | | | |
| 805 | | | 381 | | | 120 | 105 | | | | 17 | TS 32 T93-1 | | | | | | |
| 806 | | | 382 | | | 120 | 105 | | | | 13 | TS 36 T94-1 | | | | | | |
| 807 | | | 383 | | | 120 | 105 | | | | 9 | TS 40 T95-1 | | | | | | |
| 808 | | | 384 | | | 120 | 105 | | | | 5 | TS 44 T96-1 | | | | | | |
| 809 | | | 385 | | | 120 | 105 | | | | 1 | TS 48 T97-1 | | | | | | |
| | | | | | | | | | | | | | | END OF LINE 137X | | | | |
| | | | | | | | | | | | | | | COMPLETE PICK UP | | | | |